Professional

Mounts and Solutions

WINTER 2013 /SPRING 2014

peerless-AV®

peerless-AV®

With the creation of the industry's first TV Mount in 1964, Peerless leads the way in today's digital environments. Our drive to innovate continues with everything we do. From the very first flat panel mount, to the only precision gear projector mount, to the world's undisputed thinnest flat panel mounts, Peerless delivers form, function and innovation in every product we produce.

In addition to being at the forefront of innovation, Peerless drove the establishment of safety standards for AV mounts over a decade ago with Underwriters Laboratories (UL). Peerless mounts are designed and manufactured in our state-of-the-art facility, giving Peerless full control over production and quality.

Peerless-AV's pledge

Peerless-AV strives to improve the quality of life for people and the environment around the world. We work together on a daily basis with our suppliers to help create a more sustainable approach to manufacturing professional-quality, professional-grade mounting solutions while minimising our environmental footprint.

Use highest recyclable content materials while maintaining our industry-leading strength and quality

RoHS 2002/95/EC — Directive 2002/95/EC compliant to maintain the highest health and safety standards of our customers and environment

Setting the standard for safety around the globe

Peerless-AV's dedication

From professional installations into homes, schools and virtually anywhere, to the retail shelf, Peerless offers innovative products for every possible application. Working closely with TV manufacturers, professional installers and integrators, we create mounting solutions that are simple-to-install, offer incredible versatility and are ready for the latest technology and trends. We are dedicated to providing simply the best AV mounting solutions.

Peerless-AV's commitment

For decades, we have led the industry with the highest levels of safety and quality. Today, millions of Peerless mounts are in use around the world, trusted by professional installers and relied on by consumers.

VESA — Upholding the highest compatibility standards

Certified quality in every product

Actively participating in industry affiliations to ensure compatibility with new technology and the latest trends

1940 · 1960 · 1970 · 1980 · 1990 · 2000

1941 Company founded

1964 Developed first ever line of TV mounts for Zenith for use in hospitals and hotels

1979 Introduced Tray-style series of mounting solutions for commercial applications

1980 Launched first ever mounts for CCTV speakers and security cameras

1990 Marketed the Designer Series™ and Jumbo™ series of CRT TV mounts to the commercial market

1993 Entered the retail market with our Perfect Mount™ series of CRT TV mounts

1999 Introduced the world's first ever flat panel mount and flat panel trolley

2003 Sold the 2 millionth Jumbo mount in the U.S.

For more information and full technical product specifications visit www.peerless-av.com

If you can imagine it, we can create it with Peerless-AV Custom Mounting Solutions

Peerless-AV CMS places the resources of the industry leader in custom mounting solutions at your disposal. Whether your requirement is a simple modification to a standard Peerless-AV product or a large scale, fully bespoke installation, Peerless CMS has the experience, know-how and facilities to make your solution a reality.

Special customer requests are the very reason why Peerless CMS exists. Through our customer focused process - Define, Design, Develop and Deploy, we work with you from creating the initial concept through to the installation of your solution.

We offer highly trained teams of people who not only understand AV mounts, but also are experienced at serving your market. They are backed by over 40 years of experience.

Peerless-AV is driven by the challenge of unique customer requirements. We have a long history of creating innovative solutions in every Professional Market - from hotels, restaurants, retail stores, hospitals, stadiums, pubs and clubs, schools and universities, we are ready to help you.

When you are thinking about custom mounting solutions, insist on Peerless-AV.

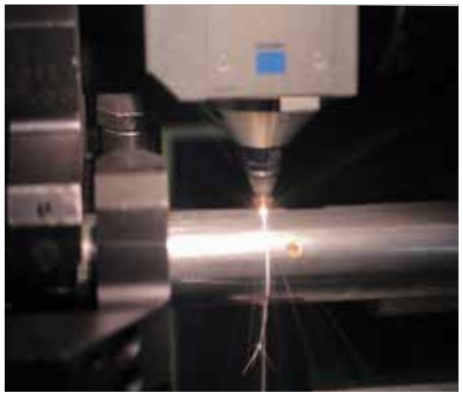

2006
Introduced the industry's first high-gloss series of mounts

2007
Introduced the industry's first ever precision gear projector mount

2008
Introduced the world's thinnest flat panel mount. At only 8.4 mm (0.33") from the wall, the Slimline® mounts were designed to work with ultra-thin flat panels

2009
Articulating and tilting wall mounts expand the Slimline range

2010
Introduced new range of Peerless AV Cables & designer AV Furniture

2011
Created 'Best of Infocomm' and 'AV Awards Accessory of the Year' award-winning full service video wall mounts

2012
Developed range of bespoke designed Portrait & Landscape kiosks for information and wayfinding applications

2013
Launch PeerCare™ range of Antimicrobial finish mounts for healthcare applications

Digital signage

Excellence in Digital Signage starts with outstanding content and correct screen placement.

Peerless mounting solutions have been deployed in thousands of locations all around the globe. Integrators, installers and network administrators have relied upon Peerless products for safety, durability and ease of installation for years.

From standard products to custom designed speciality mounts, Peerless leads the way in Digital Signage with a full range of high quality solutions to suit any requirement.

Trust Peerless to help you create outstanding Digital Signage mounting solutions.

PRODUCT SPOTLIGHT

DS-VW765

Full-Service Video Wall Mount

Designed to reduce installation time by up to 60% this modular video wall mounting system offers more convenience, more versatility and more features for a hassle free experience.

- No tedious calculations, no guesswork - custom wall plate spacers eliminate the guesswork and on-site installation calculations
- Easy-to-use pull-out/prop-open mechanism provides quick service access; spring-loaded mechanism securely clicks the display back into place
- Open wall plate architecture allows for total wall access that increases electrical and cable management options
- Integrated cable management tie-backs make display-to-display cabling easier
- Simple, tool-less micro-adjustments at 8 points seamlessly align the displays

WINNER! The Best of InfoComm

AV AWARDS 12 WINNER

See page 20 for full specifications

Education & training

As the leader in mounting solutions for the US Education market, Peerless has supplied more TV, monitor and projector mounts for educational and training facilities than any other company.

This wealth of knowledge, with so many products installed throughout the US educational system, means that Peerless has extensive experience and subsequently the conversion from CRT TVs to Flat Panel Displays is made easier when upgrading and installing new Peerless mounts.

Innovative new products including short, ultra-short and extreme-short throw projector arms, along with interactive white board mounts have been developed to complement the changing technology and requirements in the education market.

PRODUCT SPOTLIGHT

PSTK-600

Short Throw Projector Mount

The PSTK series projector short throw kit is easily adjustable to accommodate ultra-short and short throw projector distance requirements. Included is the Peerless-AV Universal PRG Projector Mount that makes image alignment easy with precision gear adjustment enabling precise image alignment.

- Aluminium alloy telescoping arm with lock down slot
- Fully integrated cable management system conceals and protects cables for a clean finish
- Three models and three different lengths to cover all short throw projectors
- Includes PRG-UNV projector mount with precision gear alignment and adjustment knobs to control tilt and roll alignment
- Wall plate with 254mm (10") of lateral shift and 152mm (6") of horizontal lift

See page 31 for full specifications

Peerless-AV has a wide range of 'market specific' mounting solutions. Shown above and throughout this brochure are the range highlights. Contact Peerless-AV to request a dedicated catalogue on any specific market sector or visit www.peerless-av.com for more information.

Corporate & office

Peerless' comprehensive portfolio of mounting solutions and in-house design enables us to offer a solution for every type of display to meet your requirements in a Corporate or Office environment.

From Ultra-Slim flat panel mounts, ideal to complement the latest ultra thin LED screens to create an eye-catching focal point for a reception area or foyer, to mobile AV trolleys & stands, perfect for supporting large screens and presentation equipment that can be moved between meeting rooms or public areas, Peerless has a full range of screen mounting products to meet any situation.

This is complemented by a comprehensive array of desktop arms for single or multiple computer monitors and a complete range of projector mounts and accessories.

PRODUCT SPOTLIGHT

SC590
Extra Large screen mobile trolley

The SC590 Floor trolley offers the most complete mobile solution for up to 90" flat panel display applications. This versatile presentation cart functions as the perfect solution for impactful meeting and presentation or simply to display wayfinding and corporate information. A full line of accessories enable the cart to be fully tailored to meet specific requirements

- Supports flat panel screens up to 90" with max mounting pattern 965 x 433mm
- Twin column design for added stability to accommodate up to 136kg
- Incremental tilt of -2°, 0° and +5° locks in position for ideal viewing angle
- Internal cable management for clean & stylish appearance
- Manoeuvres easily on 4" swivel castors for exceptional portability

See page 37 for full specifications

Healthcare & medical

From consultation room or an operating theatre to a patient room or the hospital reception area, PeerCare™ antimicrobial wall mounts deliver flexibility for how vital information is displayed and patients enjoy their entertainment.

Available in flat mount, tilt mount and articulating mount models, PeerCare mounts offer durability, ease of installation and smooth operation, while keeping flat panels or monitors close to the wall and out of the way when not in use.

All PeerCare mounts are treated with an Agion® antimicrobial finish which inhibits the growth of bacteria, mould and fungus on the surface of the product, thereby controlling the spread of infection with healthcare institutions.

PRODUCT SPOTLIGHT

SA761PU-AB/AW
Full motion wall mount

From any angle, this mount for flat panel screens reflects remarkable form and innovative function. Extending the display to more than 700mm from the wall and allowing for a full 90° of side-to-side motion for the ideal viewing angle in any position.

Also available in gloss black finish.

- Agion antimicrobial finish inhibits the spread of infection within healthcare institutions
- Available in black for administration settings or white within patient care areas
- Universal compatibility for 37" to 60" flat panel displays with mounting patterns up to VESA 600 x 400mm
- Display extends from as close to the wall as 113mm as far as 700mm
- One-Touch tilt allows for 15° angle adjustment
- Antimicrobial models available for 10" to 71" screen sizes

See page 45 for more details on Healthcare solutions

Peerless-AV has a wide range of 'market specific' mounting solutions. Shown above and throughout this brochure are the range highlights. Contact Peerless-AV to request a dedicated catalogue on any specific market sector or visit www.peerless-av.com for more information.

peerless-AV® On-line support

Mount Finder™

The easy way to match the right Peerless mount to a screen. With the ability to search through thousands of flat panel or projector models, users can quickly locate the ideal Peerless mount for their specific requirements. The most advanced mount compatibility system available, from the company that pioneered Mount Finder™ technology.

Option 1

Enter the model number of your LCD TV, Plasma TV or projector

OR

Option 2

First - Select the brand of your LCD/Plasma TV or projector

Next - Select the model number of your TV or projector

Result

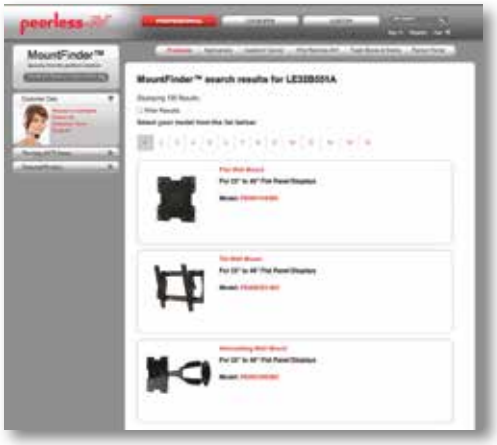

A selection of mounts for your model of flat panel TV or projector will then be displayed. You can then Click on each model for more details

Visit - **www.peerless-av.com**

Download Specifications

Technical information on Peerless mounting solutions including specification sheets with unique selling points & product line drawings, installation & assembly instruction manuals and CAD drawings with full technical specifications and dimensions are available to view and download at **www.peerless-av.com**

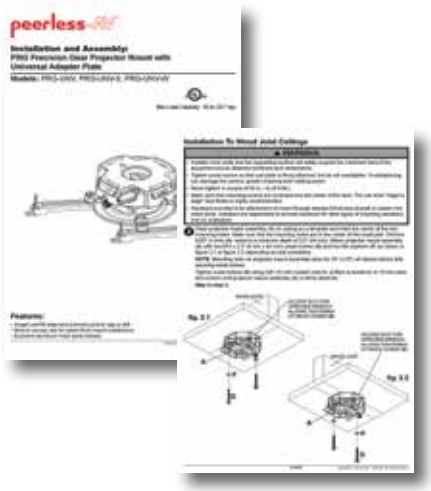

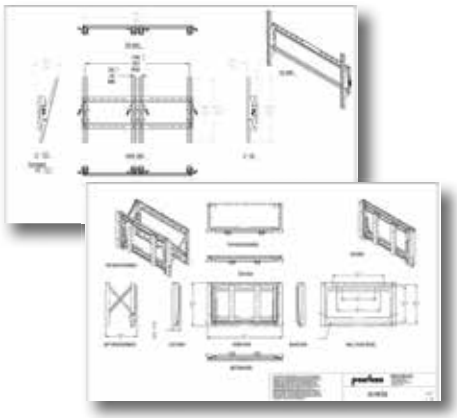

peerless-AV® Contents

FLAT PANEL WALL MOUNTS

Ultra Slim™ 08-09
SmartMount XT™ 10-11
SmartMount® 12-13
Paramount® 14-15

SPECIALITY WALL MOUNTS

Lockable Wall Mounts 16
Speciality Flat Panel Wall Mounts 17

DIGITAL SIGNAGE MOUNTS

Video Wall Features & Benefits 18
Full Service Quick Release Video Wall Mounts 19
Full Service & Ultra-slim Video Wall Mounts 20
Universal 2x2 Wall & Ceiling Mounts 21
Mobile Video Wall Trolleys 21

FLAT PANEL CEILING MOUNTS

Modular Series
- Single Screen & Floor-Ceiling Kits 22
- Quick Reference Guide 23

Ceiling Mount Kits for LCD 24
Speciality Ceiling Mounts 25

PROJECTOR MOUNTS

Modular Series
- Projector Mount Kit 26
- Quick Reference Guide 27

Projector Mounts - PRG / PRSS / PAG 28
Flush & Ceiling / Wall Mounts 29
Casio / Security Projector Mounts 30
Short Throw Projector Mounts 31

WIRELESS SOLUTIONS

HD Flow™ Pro Wireless Multi Media Kit 32-33

KIOSK & MENU BOARD

Information & Wayfinding Kiosks 34-35
Menu Board System 36
Media Player Storage Mounts 36

TROLLEYS & STANDS

FPZ, SC590 & COL Stands 37
SS560 Stands and SC/SR560 Trolleys 38
Kiosk Stands & Accessories 39

ENCLOSURES & OUTDOOR MOUNTS

Environmental Enclosures 40
Corrosion Resistant & Wind Rated Mounts 41

MONITOR & TABLET MOUNTS

Tablet & Single Screen Desktop Mount 42
Articulating Desktop & Wall Mounts 43
Multi screen & Hospitality Desktop Mounts 44

HEALTHCARE & MEDICAL

Antimicrobial Mounting Solutions 45

ACCESSORIES

Adaptor Plates & AV Accessories 46

PEERLESS-AV PRO CEILING KITS

Ceiling Mount Projector System 47
Ceiling Mount Screen System 48

Ultra Slim™

The Ultra Slim range has been specifically designed and developed to complement the very latest ultra thin flat panel screens (measuring 50.8mm/2" max depth). Becoming slimmer all the time, these ultra flat screens require a wall mount that positions the screen as close to the wall as possible.

This is the thinnest complete range of mounting solutions including flat-to-wall, flat locking, tilt and fully articulating options that all retain the same low profile design for an almost invisible appearance once mounted, yet all offer exceptional features and functionality.

So make a stunning statement with the most discreet wall mount ever developed for your brand new screen.

Ultra Slim™ Flat-locking Mounts

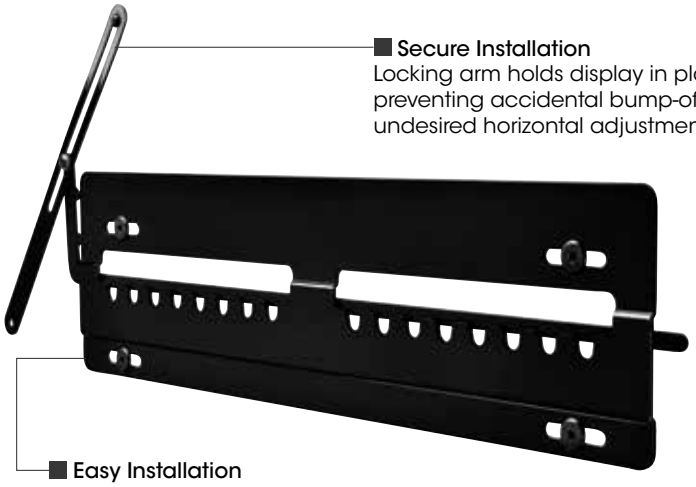

Secure Installation
Locking arm holds display in place preventing accidental bump-off or undesired horizontal adjustment

Easy Installation
Simply install the mount, attach the display and slide in the locking arm

Model shown: SUF641

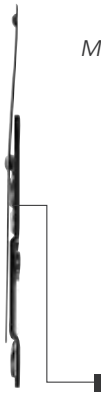

Ultra Slim Design
At only 5mm deep, the mount virtually disappears behind the screen

Ultra Slim™ Tilting Wall Mounts NEW

Easy leveling
Up to 1" adjustment after display installation

Full Motion Tilt
One-Touch tilt of ±10° for smooth viewing angle adjustment

Low Profile
Holds displays only 1" (25mm) from the wall, perfect for today's ultra-thin displays

Model shown: SUT646P

- Quick and easy, Hook-and-Hang™ one-person installation
- Safety clip and pull cord offer secure and quick attachment to the wall plate, without the use of tools

Ultra Slim™ Articulating Wall Mounts

Model shown: SUA765PU

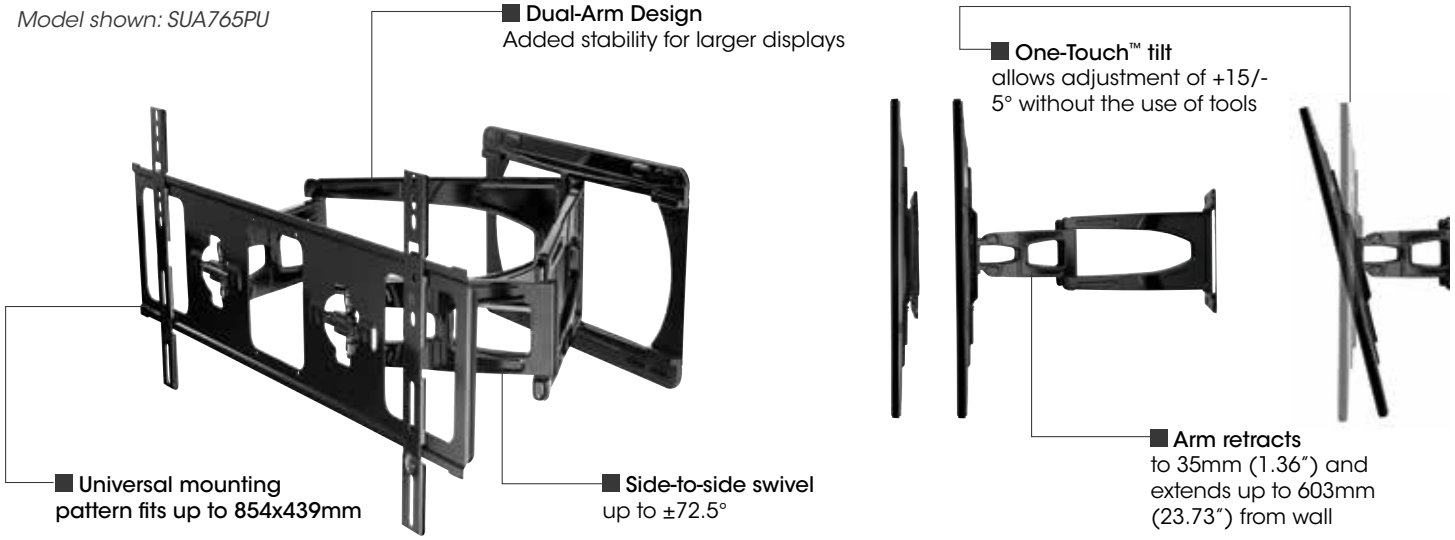
Dual-Arm Design
Added stability for larger displays
One-Touch™ tilt
allows adjustment of +15/-5° without the use of tools
Universal mounting pattern fits up to 854x439mm
Side-to-side swivel
up to ±72.5°
Arm retracts
to 35mm (1.36") and extends up to 603mm (23.73") from wall

	FLAT	FLAT LOCKING	TILT	ARTICULATING
MEDIUM Ultra Thin	peerless-AV®	peerless-AV®	SUT646 NEW Up to VESA 400x400	SUA737 Up to VESA 200x200mm
MEDIUM-LARGE Ultra Thin	SUF640P Up to VESA 400x400mm	SUF641 Up to VESA 400mm		SUA746PU Up to VESA 400x400mm
LARGE Ultra Thin	SUF650P Up to VESA 600x400mm	SUF651 Up to VESA 700mm	SUT670 NEW Up to VESA 600x400	SUA751PU Up to VESA 800x400mm
X-LARGE Ultra Thin	SUF660P Up to VESA 800x400mm	SUF661 Up to VESA 800mm		SUA765PU Up to VESA 800x400mm

Part No.	Screen sizes	Max. weight	Tilt	Swivel	Roll	Distance from wall Closed - Extended	Mounting pattern
SUA737	22-40"	27kg (60lbs)	+15/-5°	±90°	±5°	33mm - 615mm	VESA® 200x100mm, 200
SUF640P	23-46"	68kg (150lbs)	-	-	-	8mm	Universal up to 450 x 402mm
SUF641	23-46"	68kg (150lbs)	-	-	-	5mm	75 to 425mm (in 25mm increments)
SUT646P	32-46"	32kg (70lbs)	+10/-10°	-	-	25mm - 109mm	Universal up to 485 x 411mm
SUA746PU	32-46"	27kg (60lbs)	+15/-5°	±90°	±5°	34mm - 616mm	Universal up to 450 x 402mm
SUF650P	32-56"	68kg (150lbs)	-	-	-	8mm	Universal up to 742 x 449mm
SUF651	32-56"	68kg (150lbs)	-	-	-	5mm	150 to 700mm (in 25mm increments)
SUA751PU	37-55"	45kg (100lbs)	+15/-5°	±90°	±5°	34mm - 616mm	Universal up to 825 x 439mm
SUF660P	37-65"	68kg (150lbs)	-	-	-	8mm	Universal up to 825 x 449mm
SUF661	37-65"	68kg (150lbs)	-	-	-	5mm	150 to 800mm (in 25mm increments)
SUT670P	37-70"	48kg (105ibs)	+10/-10°	-	-	25mm - 109mm	Universal up to 685 x 411mm
SUA765PU	42-65"	45kg (100lbs)	+15/-5°	±72.5°	-	35mm - 603mm	Universal up to 854 x 439mm

SMARTMOUNT XT

NEW

The new SmartMount XT™ series from Peerless-AV® offers a range of versatile and easy to install mounting solutions, packed with clever features designed to enhance and simplify any professional AV installation.

SmartMount XT is the result of listening to our customers and the requirement for a premium wall mounting solution that gets closer to the wall and with extra features that save the installer time and add value to the end-user.

INTEGRATED PARTNER PROGRAM

SmartMount XT is exclusively available to members of the Peerless-AV Integrated Partner Program. This limited distribution agreement provides great benefits and elite privileges to our key customers. Contact us for more information on joining our Integrated Partner Program.

Reduced profile

The depth of the SmartMount XT range has been reduced by 35%, bringing the display closer to the wall for an almost invisible installation

Height adjustment

Every model features ±12.5mm (0.5") of vertical micro-adjustment, enabling screen height & roll to be modified by turning one screw

Open wall plate design

SmartMount XT's thin, open wall plate design gives greater flexibility for cable and power cord management options behind the display

One-Touch Tilt™

Tilt and Articulating models offer One-Touch Tilt™ of +15/-5°, with STX models adding IncreLok™ for precise screen alignment for multi-display installations

Security versions

Where an installation requires added security and theft deterrence, locking versions supplied with MasterLock 510KAD

Cable management

SAX models route cables through the arms of the mount, preventing cords becoming tangled and maintaining a clean and tidy appearance

Video conferencing shelf accessory

Can be mounted above or below display. Tilts, pivots and articulates with flat panel display.

Technical Specifications			
Part No.	For models	Colour	Max. weight
ACCXT300	SAX articulating	Black	2.27kg (5lbs)
ACCXT302	SFX flat & STX tilt	Black	2.27kg (5lbs)

Component shelf accessory

Tilts, pivots and articulates with flat panel display. Adjustable width. Compatible with SAX models.

Technical Specifications			
Part No.	For models	Colour	Max. weight
ACC953	SAX articulating	Black	6.8kg (15lbs)

Stereo speaker mount accessory

Stereo speaker accessory mount for SAX models. Tilts, pivots and articulates with the flat panel display. Adjustable height & depth.

Technical Specifications			
Part No.	For models	Colour	Max. weight
ACCXT100	SAX articulating	Black	6.8kg (15lbs)

Soundbar/centre speaker mount

Soundbar/centre channel accessory mount for SAX models. Tilts, pivots and articulates with flat panel display. Adjustable width.

Technical Specifications			
Part No.	For models	Colour	Max. weight
ACCXT200	SAX articulating	Black	11.3kg (25lbs)

SMARTMOUNT XT

Ultimate flat panel adjustability - +15°/-5° of One-Touch™ Tilt, ±90° of swivel, ±90° of roll adjustment

Simple post-installation height adjustment of up to 25mm (1") gives more control of flat panel placement

Portrait to landscape roll - quick adjust of display orientation without having to remove the screen

Internal cable management channels within arms for a clean and professional appearance

Arms retract to only 65mm (2.6") from to the wall and extends out up to 671mm (26.4") from the wall

Model shown: SAX755PU

	FLAT	TILT	ARTICULATING
MEDIUM-LARGE	SFX645P	STX645P	SAX755PU
	32-47" VESA® 400x400mm	32-47" VESA® 400x400mm	40-52" VESA® 600x400mm
LARGE	SFX650P	STX650P	SAX762PU
	32-55" VESA® 600x400mm	32-55" VESA® 600x400mm	40-63" VESA® 600x400mm
X-LARGE	SFX660P	STX660P	SAX772PU
	46-80" VESA® 800x400mm	46-80" VESA® 800x400mm	50-80" VESA® 800x600mm

Part No.	Screen sizes	Max. weight	Tilt	Swivel	Roll	Distance from wall closed - extended	Mounting pattern
SFX645P	32-47"	36kg (80lbs)	-	-	-	31mm	Up to 452x433mm
STX645P	32-47"	36kg (80lbs)	+15°/-5°	-	-	43mm - 166mm	Up to 431x433mm
SAX755PU	40-52"	36kg (80lbs)	+15°/-5°	±90°	±5°	65mm - 671mm	Up to 661x449mm
SFX650P	32-55"	54kg (120lbs)	-	-	-	31mm	Up to 744x433mm
STX650P	32-55"	54kg (120lbs)	+15°/-5°	-	-	43mm - 166mm	Up to 723x433mm
SAX762PU	40-63"	50kg (110lbs)	+15°/-5°	±90°	±5°	66mm - 674mm	Up to 661x449mm
SFX660P	46-80"	68kg (150lbs)	-	-	-	31mm	Up to 827x433mm
STX660P	46-80"	68kg (150lbs)	+15°/-5°	-	-	43mm - 166mm	Up to 805x433mm
SAX772PU	50-80"	61kg (135lbs)	+15°/-5°	±90°	±5°	66mm - 674mm	Up to 813x607mm

SMARTMOUNT®

Simply the most versatile and easy to install mounts, yet packed with clever features, SmartMount represents a complete range of LCD and Plasma screen mounts designed to enhance any professional AV installation.

Whether for a pub or club, guestroom, boardroom or classroom, all SmartMount products incorporate intelligent design to add value to a professional AV installation. Many models allow the screen to be displayed in portrait or landscape orientations, ideal for digital signage applications.

SmartMount models are available in a durable black finish to complement today's AV equipment. For the ultimate AV experience – choose SmartMount!

HCD TRADE AWARDS 2011 WINNER

Minimalistic wall plate footprint for increased wall access and aesthetics

Dual arm construction for added strength and smooth motion on larger screens

One-Touch™ tilt allows adjustment of +15°/-5° without the use of tools

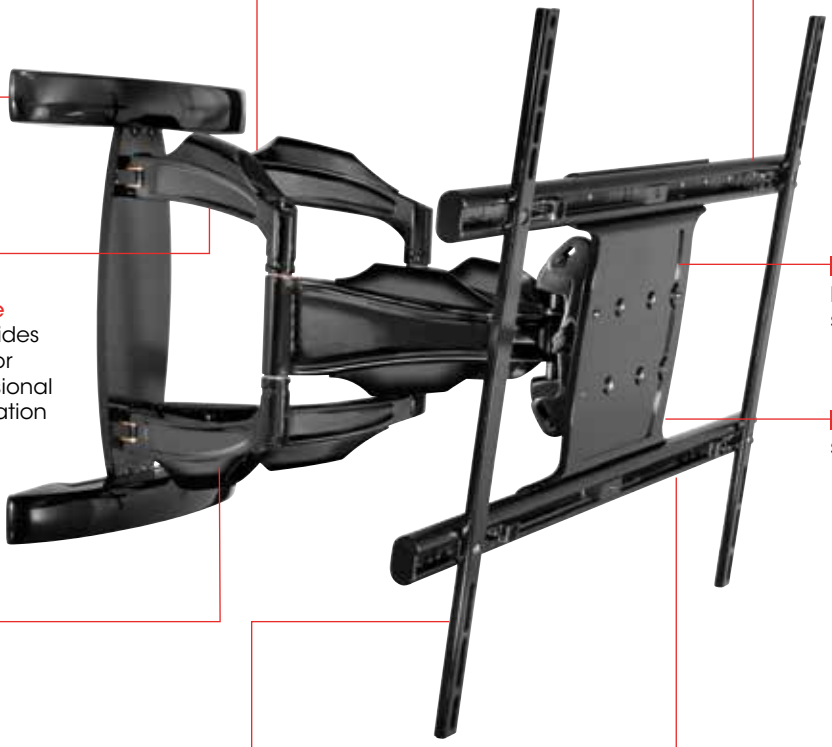

Integrated cable management provides ample clearance for cables for a professional and discrete installation

Screen rotation from portrait to landscape without removing the screen

5° roll adjustment fo leveling screen on wall

Arms extend up to 700mm (27.53") from wall

±12.5mm (0.5")vertical adjustment for fine tuning of screen position

Horizontal adjustment up to 114mm (4.5") for perfect screen placement

Dimensions & features relate to SA771PU model as shown

Recommended Accessories

ACC918	Security fasteners for mounts with VESA® 75, 100, and 200x100 mounting patterns
ACC975	Security fasteners for mounts with VESA® 200x200mm mounting patterns
ACC976	Security fasteners for mounts with VESA® 400x400mm and 600x400mm mounting patterns

	FLAT	TILT	PIVOT	ARTICULATING
SMALL 10-24″ LCD VESA® 75,100	SF630P	ST630P	SP730P	SA730P
MEDIUM 22-40″ LCD VESA® 75,100, 200x100, 200	SF632P	ST632P	SP740P	SA740P
MEDIUM-LARGE 32-47″ LCD Up to VESA® 400x400mm	SF640P	ST640P	SP746PU	SA746PU
			26-47″ screens	26-47″ screens
LARGE 32-56″ LCD/Plasma Up to 700x400mm	SF650P	ST650P	SA752PU	
			32-52″ screens Up to VESA® 600x400mm	
X-LARGE 37-63″ LCD/Plasma Up to VESA® 800x400mm	SF660P	ST660P	SA761PU	
			37-60″ screens Up to VESA® 600x400mm	
XX-LARGE 42-71″ LCD/Plasma Up to 900x500mm	SF670P	ST670P	SA771PU	
			37-71″ screens Up to VESA® 800x600mm	
XXX-LARGE 61-102″ LCD/Plasma Up to 1100x700mm	SF680P	ST680P	peerless-AV®	
				

Part No.	Screen sizes	Max. weight	Tilt	Swivel	Roll	Arm extension	Mounting pattern
SF630P	10-24″	36kg (80lbs)	-	-	-	-	VESA® 75 & 100
ST630P	10-24″	36kg (80lbs)	+15/-5°	-	-	-	VESA® 75 & 100
SP730P	10-24″	11kg (25lbs)	±35°	±90°	±7°	237mm	VESA® 75 & 100
SA730P	10-24″	11kg (25lbs)	±35°	±90°	±7°	408mm	VESA® 75 & 100
SF632P	22-40″	52kg (115lbs)	-	-	-	-	VESA® 75, 100, 200x100, 200
ST632P	22-40″	52kg (115lbs)	+15/-5°	-	-	-	VESA® 75, 100, 200x100, 200
SP740P	22-40″	36kg (80bs)	+15/-5°	±90°	±5°	300mm	VESA® 75, 100, 200x100, 200
SA740P	22-40″	36kg (80lbs)	+15/-5°	±90°	±5°	513mm	VESA® 75, 100, 200x100, 200
SF640P	32-47″	68kg (150lbs)	-	-	-	-	Universal up to 458x433mm
ST640P	32-47″	68kg (150lbs)	+15/-5°	-	-	-	Universal up to 458x433mm
SP746PU	26-47″	36kg (80lbs)	+15/-5°	±90°	±5°	319mm	Universal up to 432x408mm
SA746PU	26-47″	36kg (80lbs)	+15/-5°	±90°	±5°	531mm	Universal up to 432x408mm
SF650P	32-56″	80kg (175lbs)	-	-	-	-	Universal up to 742x433mm
ST650P	32-56″	80kg (175lbs)	+15/-5°	-	-	-	Universal up to 750x449mm
SA752PU	32-52″	41kg (90lbs)	+15/-5°	±90°	±5°	697mm	Universal up to 686x439mm
SF660P	37-63″	91kg (200lbs)	-	-	-	-	Universal up to 825x433mm
ST660P	37-63″	91kg (200lbs)	+15/-5°	-	-	-	Universal up to 832x449mm
SA761PU	37-60″	59kg (130lbs)	+15/-5°	±90°	±5°	700mm	Universal up to 686x439mm
SF670P	42-71″	113kg (250lbs)	-	-	-	-	Universal up to 908x503mm
ST670P	42-71″	113kg (250lbs)	+15/-5°	-	-	-	Universal up to 915x503mm
SA771PU	37-71″	91kg (200lbs)	+15/-5°	±90°	±5°	700mm	Universal up to 826x661mm
SF680	61-102″	159kg (350lbs)	-	-	-	-	Universal up to 1111x745mm
ST680	61-102″	159kg (350lbs)	+15/-5°	-	-	-	Universal up to 1119x745mm

PARAMOUNT™

With Paramount by Peerless, it couldn't be easier to choose the right mount for your screen... and the great news is that it's even easier to install!

Designed for ease of use and fast intuitive fitting by a professional installer, all Paramount products are finished in a stylish high gloss black to perfectly complement modern LCD and Plasma screens.

If you require a wall mount that is reliable and robust, then look no further than the comprehensive Paramount range.

VESA® 75 & 100mm
mounting hole pattern
Three adjustable pivot points
for versatile screen positioning
+/-5° Roll adjustment
allows horizontal screen levelling even when installed
One touch tilt
allows +/-35° thanks to the pre-tensioned tilt mechanism
Arms extend
from wall up to 367mm
Integrated cable management
controls cables with movement of arms

Dimensions & features relate to PA730 model as shown

Recommended Accessories

ACC918	Security fasteners for mounts with VESA® 75, 100, and 200x100 mounting patterns
ACC975	Security fasteners for mounts with VESA® 200x200mm mounting patterns
ACC976	Security fasteners for mounts with VESA® 400x400mm and 600x400mm mounting patterns

	FLAT	TILT	FIXED/TILT	PIVOT	ARTICULATING
SMALL 10-24″ LCD VESA® 75,100	PF630	PT630	peerless-AV®	PP730	PA730
MEDIUM 22-40″ LCD VESA® 75,100, 200x100, 200	PF632	PT632	peerless-AV®	PP740	PA740
MEDIUM-LARGE 23-47″ LCD Up to VESA® 400x300mm	PF640	PT640 	PFT640	peerless-AV®	
LARGE 32-56″ LCD/Plasma Up to 600x400mm	PF650	PT650	peerless-AV®	PA761	
X-LARGE 37-60″ LCD/Plasma Up to 600x400mm	PF660	PT660	PFT660 Up to VESA 800x400mm	37-70″ screens	

Part No.	Screen sizes	Max. weight	Tilt	Swivel	Roll	Arm extension	Mounting pattern
PF630	10-24″	36kg (80lbs)	-	-	-	-	VESA® 75, 100
PT630	10-24″	36kg (80lbs)	+15/-5°	-	-	-	VESA® 75, 100
PP730	10-24″	11kg (25lbs)	±35°	±90°	±5°	178mm	VESA® 75, 100
PA730	10-24″	11kg (25lbs)	±35°	±90°	±5°	367mm	VESA® 75, 100
PF632	22-40″	52kg (115lbs)	-	-	-	-	VESA® 75, 100, 200x100, 200
PT632	22-40″	52kg (115lbs)	+15/-5°	-	-	-	VESA® 75, 100, 200x100, 200
PP740	22-40″	36kg (80lbs)	+15/-5°	±90°	±7°	207mm	VESA® 75, 100, 200x100, 200
PA740	22-40″	36kg (80lbs)	+15/-5°	±90°	±7°	396mm	VESA® 75, 100, 200x100, 200
PF640	23-47″	68kg (150lbs)	-	-	-	-	Universal up to 438x329mm
PT640	23-47″	68kg (150lbs)	+15/-5°	-	-	-	Universal up to 446x329mm
PFT640	23-47″	45kg (100lbs)	0, 2, 5 & 10°	-	-	-	Universal up to 453x329mm
PF650	32-56″	80kg (175lbs)	-	-	-	-	Universal up to 730x433mm
PT650	32-56″	80kg (175lbs)	+15/-5°	-	-	-	Universal up to 738x449mm
PF660	37-60″	91kg (200lbs)	-	-	-	-	Universal up to 730x433mm
PT660	37-60″	91kg (200lbs)	+15/-5°	-	-	-	Universal up to 738x449mm
PFT660	37-60″	80kg (175lbs)	0, 2, 5 & 10°	-	-	-	Universal up to 828x433mm
PA761	37-70″	48kg (105lbs)	±15°	±95°	±5°	544mm	Up to VESA® 600x400mm

Lockable wall mounts

Peerless-AV's new Security Locking Mounts offer the next level of security within the wall mount range with a secure locking bar and provided pad lock.

With 3 size ranges in flat to wall, tilting and portrait mountable solutions, this line provides a high level of theft deterrence for 15" to 58" screens in public areas where security is of higher concern.

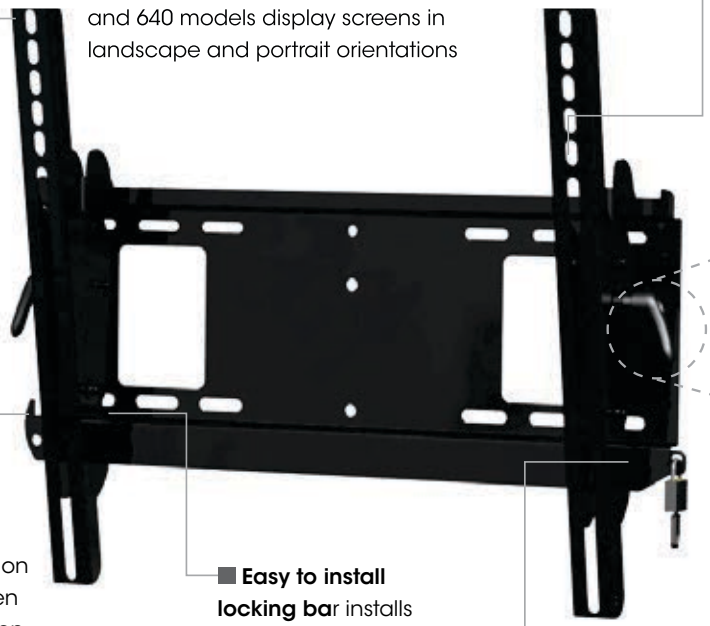

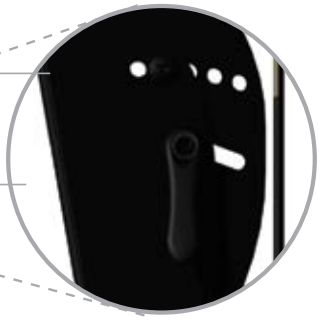

Wide screen compatibility with maximised mounting patterns; 635 and 640 models display screens in landscape and portrait orientations

Lateral adjustment to position screen at desired location

Unique Increlock™ sets screens at -5°, 0°, 5°, 10° or 15°

Ramplock™ feature on lock bar reduces screen movement and vibration after engagement

Easy to install locking bar installs from either side

Ratcheting knobs allow continuous +15°/-5° tilt adjustment

Provided security padlock adds visual theft deterrence

	LANDSCAPE		PORTRAIT	
	FLAT	TILT	FLAT	TILT
SMALL Screen sizes 15-37" LCD	PFL635	PTL635	PFL635	PTL635
MEDIUM Screen sizes 26-46" LCD	PFL640	PTL640	PFL640	PTL640
MEDIUM/ LARGE Screen sizes 32-58" LCD & Plasma	PFL650	PTL650	PFLP650	PTLP650

Part No.	Screen Size	Orientation	Max Load	Mounting pattern
PFL635	15"-37" LCD	Landscape / Portrait	56kg (125lbs)	Up to VESA® 200x200
PTL635	15"-37" LCD	Landscape / Portrait	56kg (125lbs)	Up to VESA® 200x200
PFL640	26"-46" LCD	Landscape / Portrait	68kg (150lbs)	Up to VESA® 400x400mm
PTL640	26"-46" LCD	Landscape / Portrait	68kg (150lbs)	Up to VESA® 400x400mm
PFL650	32"-58" LCD & Plasma	Landscape	79kg (175lbs)	Up to VESA® 700x400mm
PTL650	32"-58" LCD & Plasma	Landscape	79kg (175lbs)	Up to VESA® 700x400mm
PFLP650	32"-58" LCD & Plasma	Portrait	68kg (150lbs)	Up to VESA® 700x400mm
PTLP650	32"-58" LCD & Plasma	Portrait	68kg (150lbs)	Up to VESA® 700x400mm

PLA SERIES Articulating Dual Arm

- Three pivot points with up to 180° swivel for versatile display positioning
- Arm extends up to 826mm from the wall (PLAV70-UNL model)
- One-touch tilt of +10/-5° for ideal screen angle
- Post installation display levelling with ±7° of roll
- PLAV models feature ±25mm post installation vertical adjustment
- Multiple arm fixing positions at 66mm spacing for lateral display movement

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
PLA50-UNL	32-65"	68kg (150lbs)	Up to 731x433mm
PLA60-UNL	37-65"	79kg (175lbs)	Up to 731x433mm
PLAV60-UNL	37-65"	79kg (175lbs)	Up to 731x433mm
PLAV70-UNL	42-71"	90kg (200lbs)	Up to 731x433mm

Portrait & landscape wall mounts

- Easy glide design for simple screen movement in horizontal plane up to 15cm
- Requires PLP adaptor bracket to ensure compatibility with larger displays
- Compact wall plate width of 489mm perfect for portrait installations

Flat-to-Wall – SF16D

- Measures only 30mm from wall plus thickness of adaptor plate for discreet, low profile installation

Tilting – ST16D

- One-touch tilt allows adjustment of +15/-5° with optional lock in 5° increments for ideal viewing angle

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SF16D	Up to 65"	Up to 90kg	Dependent on adaptor
ST16D	Up to 65"	Up to 90kg	Dependent on adaptor
PLP-UNM	22-46"	68kg (150lbs)	Up to 438x349mm
PLP-UNL	32-65"	90kg (200lbs)	Up to 729x433mm
PLP-UN1	37-50"	68kg (150lbs)	Up to 701x400mm

Pull-out swivel wall mounts

- Ideal product for digital signage and hospitality applications (i.e., video wall) where screen must be recessed
- SP850-UNL includes additional adaptor bracket to accommodate displays up to 65"
- Arms extend up to 273mm (10.25") from wall
- Pull-out swivel with up to 90° rotation (±45° left or right)
- 0, 5 or 10° lockable tilt
- Integrated cable management
- ±1° roll for horizontal screen alignment during installation
- Locking tab included for optional swivel restriction to one side
- Lock Key™ installation tool securely extends arms for screen installation
- Black finish

SP850-UNL

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mounting pattern
SP850	26-58"	Black	68kg (150lbs)	VESA® 100, 200x100mm
SP850-2X2	32-65"	Black	68kg (150lbs)	VESA® 200x200mm
SP850-UNL	32-65"	Black	68kg (150lbs)	Universal up to 729 x 432mm

In wall mounts

- Installs between 406mm (16") wood stud centres
- Stud-locating tabs adjust 6mm (¼") left or right to accommodate stud spacing
- Removable outlet and cable management access plates make installation easy
- Can be inverted to position mounting arm to left or right

IM746P

- Includes articulating mount for up to 46" displays
- Full range of motion with ±15° tilt, ±45° swivel & ±5° roll

IM760PU

- Includes articulating mount for up to 65" displays
- Full range of motion with +10/-5° tilt, ±45° swivel & ±7° roll

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mounting pattern
IM746P	22-46"	Black	32kg (70lbs)	Up to VESA 400x400mm
IM760PU	32-65"	Black	90kg (200lbs)	Universal up to 730x433mm

Digital Signage mounting solutions

Excellence in Digital Signage starts with outstanding content and screen placement.

Peerless-AV mounting solutions have been deployed in thousands of locations all around the globe. Integrators, installers and network administrators have trusted Peerless mounts for quality, durability and ease of installation for decades.

From standard products to custom designed speciality mounts, Peerless leads the way in Digital Signage with aesthetics, logistics and creative, high quality solutions to suit any requirement.

Peerless-AV understands the challenges facing installers and integrators and our experience in the market has led to the creation of mounts that are packed with innovative features that offer up to a 60% reduction in installation time.

All the Peerless-AV video wall mounts have the added option of screen specific spacers, custom made to the dimensions of individual models to eliminate on-site measuring to ensure perfect display alignment every time.

Additional features allow ease of access for servicing and maintenance, which contributes to an installer-friendly experience.

Trust Peerless-AV to help you create outstanding Digital Signage with their innovative mounting solutions. For more information on additional Digital Signage products that are available please contact Peerless-AV sales on +44 (0)1923 200 100.

WINNER! The Best of InfoComm sponsored by NSC

AV AWARDS 12 WINNER

- Quick installation with less measuring & fewer calculations - saves up to 60% installation time
- Open wall plate architecture allows for total wall access that increases electrical and cable management options

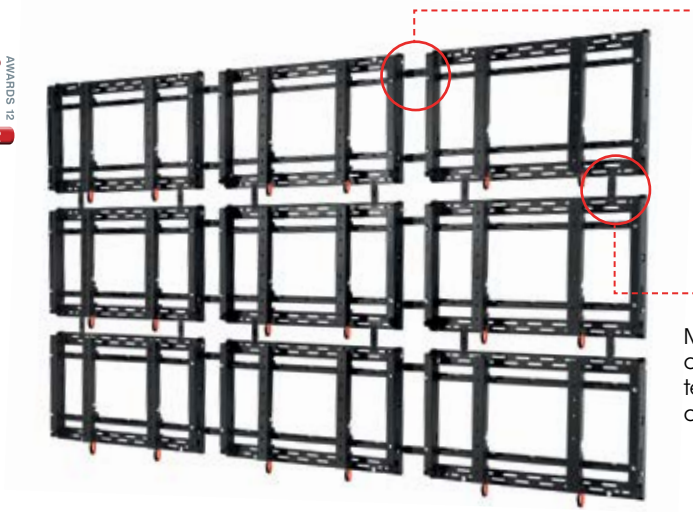

Modular design incorporating optional custom screen-specific spacers. No tedious measurements and on-site calculations required.

Simple, tool-less micro-adjustments at 8 points seamlessly align the displays

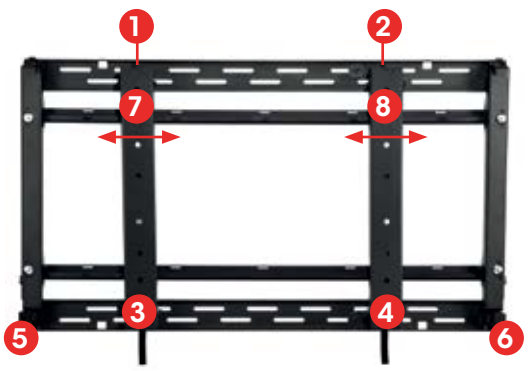

Corner forward & back adjustment

Points 1-4

Vertical adjustment

Points 5&6

NEW Quick release

Spring loaded push release mechanism for quick & convenient access to mid-array & recessed displays.

Full-service quick release wall mount
for flat panel displays up to 65" - Landscape/Portrait

NEW

- Easy-to-use pop out mechanism provides quick service access, even for in-wall applications, while spring loaded mechanism securely clicks the display back into place
- Quick release can be restricted with a locking screw when feature is not needed
- Overall depth is equivalent to existing VW765 / VW665 models enabling mixed product video wall arrays
- Carriage extension force can be adjusted to accommodate the weight of the display
- Modular mount for unlimited video wall display configurations
- Custom wall plate spacers eliminate the guesswork and on-site installation calculations
- Tool-less micro-adjustments at 8 points seamlessly align the displays
- Integrated cable management tie-backs make display-to-display cabling simple
- Available in both Landscape (LQR) and Portrait (PQR) orientations for added versatility in a wide range of digital signage applications

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mounting pattern
DS-VW765-LQR	40 - 65"	Black	57kg (125lbs)	Up to VESA® 700 x 400mm
DS-VW765-PQR	42 - 65"	Black	57kg (125lbs)	Up to VESA® 400 x 600mm

Full-service quick release wall mount
for flat panel displays up to 95"

NEW

- Easy-to-use pop out mechanism provides quick service access, even for in-wall applications, while spring loaded mechanism securely clicks the display back into place
- Quick release can be restricted with a locking screw when feature is not needed
- Universal adaptors accommodate VESA patterns up to 600x600mm in both landscape and portrait orientation
- Carriage extension force can be adjusted to accommodate the weight of the display
- Modular mount for unlimited video wall display configurations
- Custom wall plate spacers eliminate the guesswork and on-site installation calculations
- Tool-less micro-adjustments at 8 points seamlessly align the displays
- Integrated cable management tie-backs make display-to-display cabling simple

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mounting pattern
DS-VW795-QR	65 - 95"	Black	102kg (225lbs)	Up to VESA® 600 x 600mm

Full-service landscape video wall mount

- Modular mount for unlimited video wall display configurations
- Custom wall plate spacers eliminate the guesswork and on-site installation calculations
- Tool-less micro-adjustments at 8 points seamlessly align the displays
- Displays click securely into place against the wall with spring-loaded mechanism
- Displays and mounts sit flush against the wall for a clean side appearance
- Pull-out/prop-open mechanism provides quick service access
- Integrated cable management tie-backs make display-to-display cabling simple
- Included security hardware prevents the mount from extending out from the wall

Watch the video by scanning the QR code.

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mount pattern
DS-VW765-LAND	40 - 65″	Black	57kg (125lbs)	Up to VESA® 700 x 400mm
DS-VWSxxx	Contact Peerless-AV for screen specific spacers			

Full-service portrait video wall mount

- Modular mount for unlimited video wall display configurations
- Custom wall plate spacers eliminate the guesswork and on-site installation calculations
- Tool-less micro-adjustments at 8 points seamlessly align the displays
- Displays click securely into place against the wall with spring-loaded mechanism
- Displays and mounts sit flush against the wall for a clean side appearance
- Pull-out/prop-open mechanism provides quick service access
- Integrated cable management tie-backs make display-to-display cabling simple
- Included security hardware prevents the mount from extending out from the wall

Watch the video by scanning the QR code.

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mount pattern
DS-VW765-POR	42 - 65″	Black	57kg (125lbs)	Up to VESA® 400 x 600mm
DS-VWSxxx	Contact Peerless-AV for screen specific spacers			

Ultra-Slim video wall mount

- Modular design allows creation of unlimited video wall display configurations
- Dedicated wall plate spacers available for each specific screen to eliminate on-site guesswork and screen spacing calculations
- Horizontal adjustment makes aligning screens quick & easy
- Ultra-slim design provides a streamlined profile at only 17.5mm depth
- Durable locking rails hold screen ensuring a safe and secure installation
- Includes security hardware that helps deter tampering and loss
- VESA® 200x200mm up to 600x400mm compliant in 100mm increments - additional patterns supported with adaptor plates

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
DS-VW650	40-50″	34kg (75lbs)	Up to VESA® 600x400mm
DS-VWSxxx	Contact Peerless-AV for screen specific spacers		

Flat video wall mount

- Modular mount for unlimited video wall display configurations
- Tool-less micro adjustment at 8 points seamlessly align the displays
- Custom wall plate spacers eliminate guesswork and on-site installation calculations
- Integrated cable management tie-backs make display-to-display cabling simple
- Displays and mounts sit flush against the wall for a clean profile
- Included security hardware deters tampering and theft
- Adjustable VESA® mounting patterns from 200x200mm up to 700x400mm, compatible with Peerless-AV PLP adaptor plates
- Compatible with Peerless-AV DS-VW765-LAND Full Service Video Wall Mounts

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
DS-VW665	40-65″	57kg (125lbs)	Up to VESA® 700x400mm
DS-VWSxxx	Contact Peerless-AV for screen specific spacers		

Universal 2x2 video wall mount

- Single box solution for 2x2 video wall mounting
- Horizontal adjustment makes mounting and aligning displays quick and easy
- Compatible with most displays 40"-46" (DS-VW646) and 46"-60" (DS-VW660)
- Included security screws deter tampering and theft
- Includes adapter rail alignment measuring plate to assist in the mounting of the displays
- Fully VESA® complaint - check compatibility formula for guaranteed fitment

DS-VW660-2X2

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
DS-VW646-2X2	40-46"	272kg (600lbs)	Universal
DS-VW660-2X2	47-60"	272kg (600lbs)	Universal

Universal 2x2 ceiling mount NEW

- Ceiling mounted 2 x 2 video wall solution for 40-55" flat panel displays
- Supports mounting hole patterns of VESA® 200 x 200 up to 600 x 400mm. Additional patterns supported with adapter plates
- Tilts options of 5°, 10°, 15° and 20° for ideal viewing angle at any height
- Eight points of tool-less micro adjustment provide precise display alignment
- Compatible with Peerless-AV standard columns & ceiling plates for a full range of mounting options
- Included security hardware deters tampering and loss

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
DS-VWT955	40-55"	182kg (400lbs)	Universal up to 600 x 400

Mobile Video Wall Trolley for 2x2, 3x2 and 3x3 configurations

- Free standing mobile digital signage solution for 4, 6 or 9 screens in 2x2, 3x2 and 3x3 configurations
- Tool-less micro adjustment at 8-points seamlessly align the displays
- Vertical height adjustment for ideal screen placement and positioning
- Cable management through stand uprights to conceal all unsightly wires
- Heavy duty, lockable castors enable safe and easy manoeuvrability over various floor surfaces
- Base cover with internal media player shelf hides wires for a clean appearance
- Mounting patterns up to 400mm vertically. Additional patterns supported with adaptor plates
- Coverts from a trolley to a stand with additional Peerless-AV foot accessory ACC310

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
DS-VWC560	40-60"	227kg (500lbs)	Universal up to 600x400mm
DS-VWC555-3X2	46-55"	295kg (650lbs)	Up to 400mm vertical
DS-VWC655-3X3	46-55"	454kg (1000lbs)	Up to 400mm vertical

NEW

Modular Series flat panel screen kits

Peerless-AV constantly strives to improve the versatility and ease of use of our products, and having listened to the feedback from installers and integrators it is apparent that the market requires a product range that can fulfil multiple requirements from a limited number of SKUs. Thus the Modular Series has been introduced as a universal ceiling mount solution with just over a dozen components in the range.

Developed particularly for professional AV applications the Modular System is designed in the UK and manufactured from the same high quality materials as all Peerless mounts for the assurance of durability. For peace of mind all products are tested to the highest UL safety standards and include a number of innovative features and benefits specific to flat panel mounting, such as fixed tilt and multiple screen options, making them the most versatile and easy to install products available.

MOD-FPSKITxxx / MOD-FPSKITxxx-CPF
Flat panel ceiling mount kits

MOD-FPSKIT100 includes:
1 x MOD-CPC
1 x MOD-P100
1 x MOD-FPMS
1 x MOD-UNL
Also available as:
MOD-FPSKIT150 : 1.5m
MOD-FPSKIT200 : 2m

MOD-FPSKIT100-CPF includes:
1 x MOD-CPF
1 x MOD-P100
1 x MOD-FPMS
1 x MOD-UNL
Also available as:
MOD-FPSKIT150-CPF : 1.5m
MOD-FPSKIT200-CPF : 2m

MOD-FCSKIT300
3m floor-to-ceiling mount kit

MOD-FCSKIT300 includes:
2 x MOD-CPF: Heavy duty flat ceiling/floor plate
1 x MOD-P300: 3.0m chrome pole
1 x MOD-ASC: Screen stacking clamp
1 x MOD-FPMS: Single screen mount
1 x MOD-UNL: Large universal adaptor

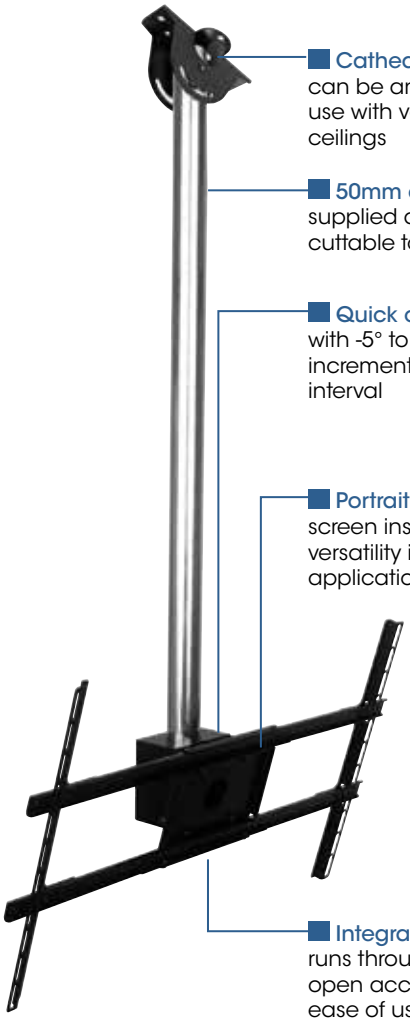

Cathedral ceiling plate can be angled up to ±45° for use with vaulted or sloping ceilings

50mm diameter column supplied as 1.5m length and cuttable to required size

Quick connect design with -5° to +20° of tilt and incremental lock at every 5° interval

Portrait or Landscape screen installation for added versatility in digital signage applications

Integrated cable channel runs through column with open access at both ends for ease of use

Optional media box holder accessory available (MOD-MBM / MOD-MBL)

Easy Installation of a single screen between floor and ceiling up to 3m height (other heights available)

Back-to-Back Mounting plate available for dual screen applications (MOD-FPMD).

Modular Design enables additional screens to be stacked on single pole as shown (optional)

Versatile Positioning of screen at any point along the full height of the pole

Heavy Duty flat plate mounts to wood or concrete ceiling and floor

1 Choose the ceiling plate

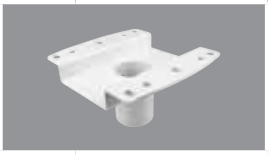

Heavy Duty Ceiling/Floor Plate
MOD-CPF (Black) MOD-CPF-W (White)
Mounts to concrete & wood joist ceilings
Max Weight: 170kg (374lbs)

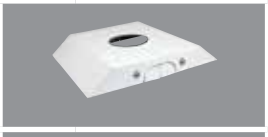

Ceiling Plate Cover
MOD-ACF (WHITE)
Cover for MOD-CPF ceiling/floor plate

Cathedral Ceiling Plate
MOD-CPC (Black) MOD-CPC-W (White)
Mounts to concrete & wood joist ceilings
Tilt: +/- 60° **Max Weight:** 120kg (264lbs)

I-Beam Ceiling Plate
MOD-CPI (Black) MOD-CPI-W (White)
Fully adjustable for I-beams 85mm to 250mm wide
Tilt: +/- 60° **Max Weight:** 120kg (264lbs)

U-Bolt Accessory Kit
MOD-AUB (Black) MOD-AUB-W (White)
Clamps around 40mm to 85mm (1.5-3.3") diameter pipes, trusses etc. Adapts to MOD-CPC & MOD-CPF
Max Weight: 120kg (264lbs)

2 Select the pole length & accessories

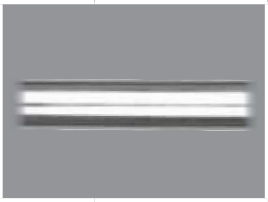

Extension Poles
MOD-P100 (Chrome) 1.0m (39")
MOD-P150 (Chrome) 1.5m (59")
MOD-P200 (Chrome) 2.0m (78")
MOD-P300 (Chrome) 3.0m (118")
Also available in White (add '-W' to Part No.)

Trim Disc
MOD-ATD-W (White)
Fits around 50mm pole to clean up rough cut through false ceiling tile

Pole Coupler
MOD-APC (Chrome)
Connects 2 x 50mm poles

Pole Drill Fixture
MOD-ADF (Black)
Allows marking and positioning of new installation holes to be drilled into newly cut 50mm poles

3 Screen configuration adaptor

Single Screen Mount
MOD-FPMS (Black) MOD-FPMS-W (White)
Screen Size:10" to 65" *(depending on screen adaptor)*
VESA® Pattern: 75/100 compliant
Max Weight: 100kg (220lbs)
Tilt: +20/-5° **Swivel:** 360°

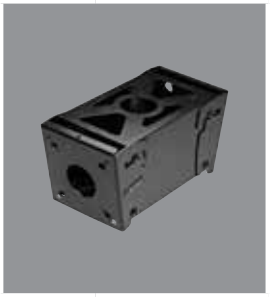

Back-to-Back Screen Mount
MOD-FPMD (Black) MOD-FPMD-W (White)
Screen Size:10" to 65" *(depending on screen adaptor)*
VESA® Pattern: 75/100 compliant
Max Weight: 170kg (374lbs)
Tilt: +20/-5° **Swivel:** 360°

Screen-Stacking Clamp
MOD-ASC (Black) MOD-ASC-W (White)
Clamps around extension pole to stack multiple single or dual back-to-back screens **Max Load:** 85kg (187lbs)

4 Required screen mount/media box

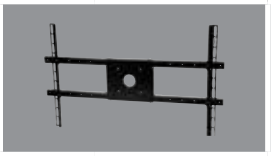

Large Universal Adaptor
MOD-UNL
Screen Size: 32"-60" flat panel screens
VESA® Pattern: Up to 700x400 (WxH)
Max Weight: 60kg (132lbs)

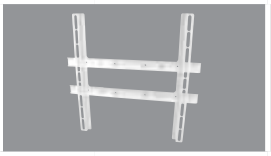

Medium Universal Adaptor
MOD-UNM (Black) MOD-UNM-W (White)
Screen Size: 26"-46" LCD screens
VESA® Pattern: Up to 450x400 (WxH)
Max Weight: 60kg (132lbs)

Media Box Holder NEW
MOD-MBM
Media Player Mounting Accessory
For Mini Computer and AC Power Adaptor

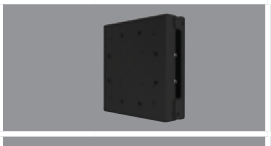

Media Box Holder NEW
MOD-MBL
Media player holder accessory for use with MOD-FPMS modular single screen mount

VESA 200x100 Adaptor
ACC-V2x1 For MOD-FPMS & MOD-FPMD
Screen Size: up to 26"
VESA Pattern: 200x100
Max Weight: 30Kg (66lbs)

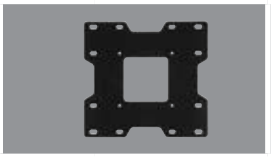

VESA 200x200 Adaptor
ACC-V2x2
Screen Size: Up to 37"
VESA Pattern: 200x200, 200x100
Max Weight: 30kg (66lbs)

Ceiling mounts for LCD screens

- VESA® 75 and 100 compliant for LCD screens 15-24″
- Ideal for flat finished concrete or wood joist ceilings
- Adjustable extension length (see table below)
- Continuous tilt of +15°/-5° with optional lock in 5° increments
- Internal cable management within extension channels for clean, clutter free appearance
- Safety catch designed into extension channels to ensure user and equipment safety
- Works with standard 102mm (4″) loops for use with round, square, rectangular or I-beam truss up to 76 x 89mm (3 x 3.5″)
- Available in black, silver (-S) or white (-W) finishes

- **Ceiling mount extension length**
- **PC930A**: 249-353mm (9.7-13.9″)
- **PC930B**: 350-556mm (13.8-21.9″)
- **PC930C**: 514-864mm (20.2-34″)

Technical Specifications					
Part No.	Screen sizes	Extension	Colour	Max. weight	Mounting pattern
PC930A	15-24″	249-353mm (9.7-13.9″)	Black, Silver or White	23kg (50lbs)	VESA® 75, 100
PC930B	15-24″	350-556mm (13.8-21.9″)	Black, Silver or White	23kg (50lbs)	VESA® 75, 100
PC930C	15-24″	514-864mm (20.2-34″)	Black, Silver or White	23kg (50lbs)	VESA® 75, 100

Ceiling mounts for LCD screens

- VESA® 75, 100, 200x100mm and 200x200mm compliant for LCD screens 15-40″
- Ideal for flat finished concrete or wood joist ceilings
- Adjustable extension length (see table below)
- Continuous tilt of +15°/-5° with optional lock in 5° increments
- Internal cable management within extension channels for clean, clutter free appearance
- Safety catch designed into extension channels to ensure user and equipment safety
- Works with standard 102mm (4″) loops for use with round, square, rectangular or I-beam truss up to 76 x 89mm (3 x 3.5″)
- Available in black, silver (-S) or white (-W) finishes

- **Ceiling mount extension length**
- **PC932A**: 249-353mm (9.7-13.9″)
- **PC932B**: 350-556mm (13.8-21.9″)
- **PC932C**: 514-864mm (20.2-34″)

Technical Specifications					
Part No.	Screen sizes	Extension	Colour	Max. weight	Mounting pattern
PC932A	15-40″	249-353mm (9.7-13.9″)	Black, Silver or White	36kg (80lbs)	VESA® 75, 100, 200x100, 200
PC932B	15-40″	350-556mm (13.8-21.9″)	Black, Silver or White	36kg (80lbs)	VESA® 75, 100, 200x100, 200
PC932C	15-40″	514-864mm (20.2-34″)	Black, Silver or White	36kg (80lbs)	VESA® 75, 100, 200x100, 200

Multi display ceiling mounts

A fully flexible system for mounting multiple flat panel displays, the Peerless-AV Multi Display system allows you to ceiling mount up to four LCD or Plasma screens in a variety of configurations. Whether your requirement is for an in-line, circular or curved array of displays, Peerless-AV has the solution.

Curvilinear configuration

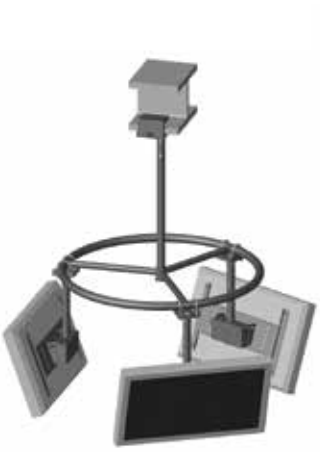

Circular configuration

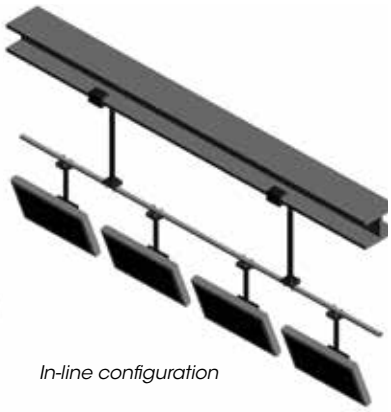

In-line configuration

For more information contact the Peerless-AV sales team on +44 (0) 1923 200 100

Dual Display ceiling mount

- Ideal for twin screen digital signage applications from a single column
- Independent swivel and tilt allows each display to be set at the perfect viewing angle
- Included universal adaptor plate will accommodate most displays in the 40"-70" range
- Compatible with an extensive line of Peerless-AV fixed length and adjustable extension columns
- Simple hook on display attachment makes set-up quick and easy

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mounting pattern
DST970x2	40-70"	Black	113kg (250lbs)	Universal up to 730x433mm

Dedicated for Panasonic

- Designed exclusively to accommodate Panasonic 85" and 103"flat panel screens
- Keyhole slots provide quick and easy installation
- Tilts to 5°, 10°, 15° or 20° for optimal viewing angle at any mounting height
- Convenience of full 360° swivel for perfect positioning (ceiling mount only

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mounting type
PANA-85CEIL	85" Pana	Black	136kg (300lbs)	Ceiling
PANA-103MTV	103" Pana	Black	226kg (500lbs)	Wall
PANA-85WM	85" Pana	Black	122kg (270lbs)	Wall

Modular Series projector mount kit

Peerless-AV constantly strives to improve the versatility and ease of use of our products. Having listened to the feedback from installers and integrators it is apparent that the market requires a product range that can fulfil multiple requirements from a limited number of SKUs. Thus, the Modular Series has been introduced as a universal ceiling mount solution with just a dozen component options making up the full projector mount range.

With the ability to select the required ceiling plate and column length, along with a choice of projector mounts and adaptor plates this is an incredibly versatile system. If that wasn't simple enough Peerless-AV has created a one-box kits (MOD-PRSKIT) that will be perfect for many professional installations. Manufactured from the highest quality materials and tested in excess of industry standards the Modular Series provides the assurance of durability and safety.

MOD-PRSSKITxxx

Ceiling mount kits - cathedral

MOD-PRSSKIT150 includes:

1 x MOD-CPC: Cathedral ceiling plate

1 x MOD-P150: 1.5m chrome pole

1 x MOD-PMA: Projector adaptor

1 x PRSS-UNV: PRSS-UNV projector mount

Also available as:

MOD-PRSSKIT100 : 1m drop

MOD-PRSSKITxxx-CPF

Ceiling mount kits - flat

MOD-PRSSKIT150 -CPF includes:

1 x MOD-CPF: Flat ceiling plate

1 x MOD-P150: 1.5m chrome pole

1 x MOD-PMA: Projector adaptor

1 x PRSS-UNV: PRSS-UNV projector mount

Also available as:

MOD-PRSSKIT100 CPF : 1m drop

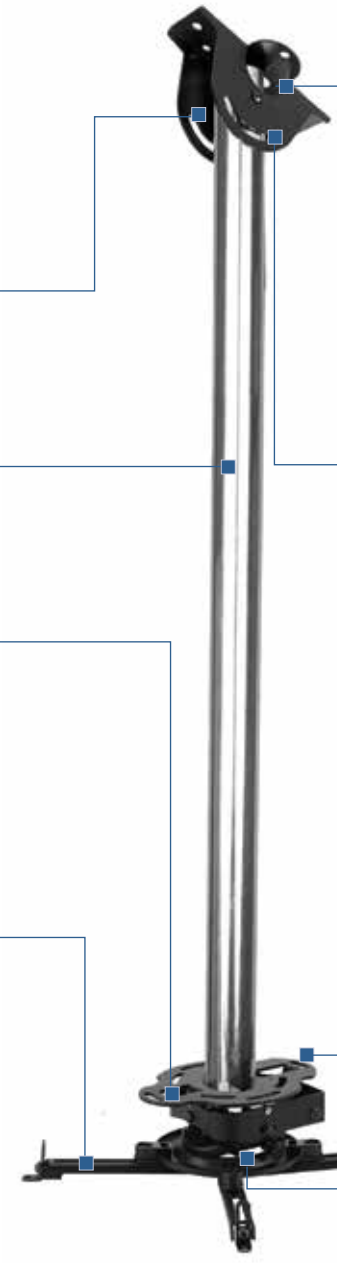

Cathedral ceiling plate can be angled up to ±60° for use with vaulted or sloping ceilings

50mm diameter column supplied as 1.5m length and cuttable to required size

Fully adjustable +15°/-20° tilt, 360° swivel and ±5° roll adjustments for the perfect image alignment

Spider® universal adaptor plat extends up to 448mm to fit most projector models

Universal mounting installs to wood joist and concrete or to truss/pipes via accessory clamp kit

M8 installation bolts are use throughout for strength and peace of mind

Quick release mechanism for fast and simple installation and maintenance

Cable management via access opening allowing cables to be routed through main pole and out of sight

1 Choose the ceiling plate

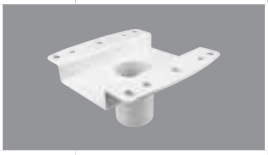

Heavy Duty Ceiling/Floor Plate

MOD-CPF (Black) MOD-CPF-W (White)

Mounts to concrete & wood joist ceilings
Max Weight: 170kg (374lbs)

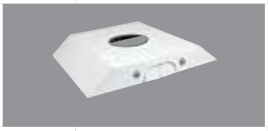

Ceiling Plate Cover

MOD-ACF (WHITE)

Cover for MOD-CPF ceiling/floor plate

Cathedral Ceiling Plate

MOD-CPC (Black) MOD-CPC-W (White)

Mounts to concrete & wood joist ceilings
Tilt: +/- 60° **Max Weight:** 120kg (264lbs)

I-Beam Ceiling Plate

MOD-CPI (Black) MOD-CPI-W (White)

Fully adjustable for I-beams 85mm to 250mm wide
Tilt: +/- 60° **Max Weight:** 120kg (264lbs)

U-Bolt Accessory Kit

MOD-AUB (Black) MOD-AUB-W (White)

Clamps around 40mm to 85mm (1.5-3.3") diameter pipes, trusses etc.
Adapts to MOD-CPC & MOD-CPF
Max Weight: 120kg (264lbs)

2 Select the pole length & accessories

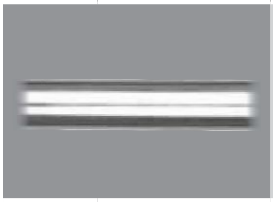

Extension Poles

MOD-P100 (Chrome) 1.0m (39")
MOD-P150 (Chrome) 1.5m (59")
MOD-P200 (Chrome) 2.0m (78")
MOD-P300 (Chrome) 3.0m (118")

Also available in White (add '-W' to Part No.)

Trim Disc

MOD-ATD-W (White)

Fits around 50mm pole to clean up rough cut through false ceiling tile

Pole Coupler

MOD-APC (Chrome)

Connects 2 x 50mm poles

Pole Drill Fixture

MOD-ADF (Black)

Allows marking and positioning of new installation holes to be drilled into newly cut 50mm poles

3 Projector adaptor plate

NEW

Projector Mount Adaptor

MOD-PMA (Black)

MOD-PMA-W (White)

4 Required projector mount

NEW

PRG Projector Mount

PRG-UNV (Black) Also available in Silver (-S) and White (-W)

Tilt: ±20° **Pan:** 360° **Roll:** ±10°
Max Weight: 22kg (50lbs)
Mounting Pattern: Universal up to 448mm

NEW

PRSS Projector Mount

PRSS-UNV (Black) Also available in Silver (-S) and White (-W)

Tilt: +15/-20° **Pan:** 360° **Roll:** ±5°
Max Weight: 23kg (50lbs)
Mounting Pattern: Universal up to 448mm

Projector Enclosure

PE1120 (Black) Also available in White (-W) as shown

Secures and protects virtually any projector and mount up to 508 x 508 x 280mm (20 x 20 x 11") (WDH)

Security Mount

PSMU-PRS (Black) Also available in White (-W) as shown

Tilt: +20°/-5° **Swivel:** 360° **Roll:** ±10°
Max Weight: 11kg (25lbs)
Mounting Pattern: Universal tray pattern up to 330x280mm

PRG projector mount

- Patent pending precision gear provides ImageLock™ alignment to accurately hold image position, virtually eliminating any sag or drift
- Two adjustment controls for tilt and roll image alignment – engage using a Phillips screwdriver or adjust by hand
- Spider® universal adaptor plate extends up to 448mm to fit most projector models
- Can be flush mounted or used in conjunction with extension poles and plates
- Quick release mechanism to easily service projector
- Horizontal wrench access slots make flush mounting installations quick and easy
- Pre-installed security screws provide optional tilt and roll lock to prevent tampering with adjustment controls
- Cable management allows cables to be routed through projector mount and out of sight
- Available in black, silver (-S) and white (-W) finishes

Compatible with both Peerless-AV Modular ceiling kits (see previous page) and Peerless-AV Pro ceiling kits (see page 47)

Technical Specifications				
Part No.	Tilt/Swivel/Roll	Colour	Max. weight	Mounting pattern
PRG-UNV	±20°, 360°,±10°	Black, Silver or White	22kg (50lbs)	Universal (up to 448mm)

PRSS projector mount NEW

- Independent roll, pitch and yaw adjustments provide easy image alignment
- Specifications: Pitch: +15°/-20° Roll: ±5° Swivel: 360° (during installation)
- Pre-installed security screws provide tilt and roll locking ability to prevent tampering and adjustments
- Low profile design allows projector to be flush with the ceiling
- Open frame assembly provides easy cable routing through the projector mount itself
- Quick release mechanism to easily service projector

Compatible with both Peerless-AV Modular ceiling kits (see previous page) and Peerless-AV Pro ceiling kits (see page 47)

Technical Specifications				
Part No.	Tilt/Swivel/Roll	Colour	Max. weight	Mounting pattern
PRSS-UNV	+15°/-20°, 360°,±5°	Black, Silver or White	11kg (25lbs)	Universal (up to 448mm)

Arakno heavy duty geared projector mount

- Engineered for compact strength and able to support multimedia projectors up to 45kg (100lbs)
- Patented gear technology enables effortless adjustment to achieve precise image alignment
- Provides superior range of functionality with tilt and roll of ±45°
- No tools required for image alignment, dual knobs design provides hassle-free method of adjusting the gears
- Spider® universal adaptor plate extends up to 448mm to fit most projector models
- Quick release mechanism for easy projector servicing
- All-in-one box solution, includes a ceiling plate, threaded cable management coupler and Peerless Spider® universal adaptor plate

Technical Specifications						
Part No.	Tilt	Swivel	Roll	Colour	Max. weight	Mounting pattern
PAG-UNV-HD	±45°	360°	±45°	Black or White	45kg (100lbs)	Universal (up to 448mm)

Flush & ceiling/wall projector mounts

PPF

PPA

PPB

PPC

- Provides full range of image adjustment
- Available in black, silver (-S) and white (-W) finishes
- Low profile design for flush mount installations (PPF only)
- Option to mount to either ceiling or wall (PPA and PPB models)
- Mounts to ceiling only, with up to 962mm drop (PPC models)
- Safety catch designed into extension to ensure user and equipment safety
- Internal cable management within channels for clean and tidy appearance
- Spider® universal adaptor plate extends up to 448mm to fit most projector models
- Continuous channel design for uninterrupted drop length or wall extension adjustments
- Works with standard 102mm (4") loops for use with round, square, rectangular or I-beam truss up to 76x89mm (WxH)

- PPA and PPB can be installed in wall mounted orientation

Technical Specifications					
Part No.	Ceiling/wall extension	Tilt/Swivel/Roll	Max. weight	Colour	Mounting pattern
PPF	Flush to ceiling	+30°/-5°, ±20°, ±20°	23kg (50lbs)	Black, Silver or White	Universal (up to 448mm)
PPA	293-397mm/253-357mm	+20°/-5°, ±20, ±20°	23kg (50lbs)	Black, Silver or White	Universal (up to 448mm)
PPB	322-525mm/354-558mm	+20°/-5°, ±20, ±20°	23kg (50lbs)	Black, Silver or White	Universal (up to 448mm)
PPC	589-908mm (ceiling only)	+20°/-5°, ±20, ±20°	23kg (50lbs)	Black, Silver or White	Universal (up to 448mm)

Casio enclosure tilt adaptor kits

NEW

- Dedicated mount for Casio XJ-A (PCASA3550-W) or Casio XJ-M (PCASXJMT-W) projector
- Protective enclosure provides physical as well as visual security measures
- Security screws provided for added theft resistance
- Ventilation to ensure proper projector operation
- Access for all projector input connection points
- Adjustable tilt adaptor accommodates existing extension poles from 35mm to 50mm diameter
- ±50mm lateral adjustment

PCASA3550-W

PCASAXJMT-W

Technical Specifications				
Part No.	Tilt/Swivel	Colour	Max. weight	Mounting pattern
PCASA3550-W	±35°/ 360°	White	Dedicated	Casio XJ-A Series
PCASXJMT-W	±35°/ 360°	White	Dedicated	Casio XJ-M Series

Casio enclosure flush mount kits

NEW

- Dedicated mount for Casio XJ-A (PCASF-W) or Casio XJ-M (PCASXJMF-W) projector
- Protective enclosure provides physical as well as visual security measures
- Security screws provided for added theft resistance
- Ventilation to ensure proper projector operation
- Access for all projector input connection points
- Flush ceiling plate supplied with hardware for installation to concrete and wood joist ceilings
- ±50mm lateral adjustment

PCASF-W

PCASXJMF-W

Technical Specifications				
Part No.	Tilt/Swivel	Colour	Max. weight	Mounting pattern
PCASF-W	±35°/ 360°	White	Dedicated	Casio XJ-A Series
PCASXJMF-W	±35°/ 360°	White	Dedicated	Casio XJ-M Series

Casio enclosure 1m projector mount kits

NEW

- Dedicated mount for Casio XJ-A (PCASKIT100-W) or Casio XJ-M (PCASXJMK100-W) projector
- Protective enclosure provides physical as well as visual security measures
- Security screws provided for added theft resistance
- Ventilation to ensure proper projector operation
- Access for all projector input connection points
- 50mm diameter pole x 1m long included, cuttable to desired length
- ±50mm lateral adjustment
- Internal cable management for clean aesthetics

PCASKIT100-W

PCASXJMK100-W

Technical Specifications				
Part No.	Tilt/Swivel	Colour	Max. weight	Mounting pattern
PCASKIT100-W	±35°/ 360°	White	Dedicated	Casio XJ-A Series
PCASXJMK100-W	±35°/ 360°	White	Dedicated	Casio XJ-M Series

Casio enclosure promethean pole adaptor kits

NEW

- Dedicated mount for Casio XJ-A (PCASPRM-W) or Casio XJ-M (PCASXJMF-W) projector
- Protective enclosure provides physical as well as visual security measures
- Security screws provided for added theft resistance
- Ventilation to ensure proper projector operation
- Access for all projector input connection points
- Accommodates Promethean OEM extension pole with up to M16 thread
- ±50mm lateral adjustment

PCASPRM-W

PCASXJMPRM-W

Technical Specifications				
Part No.	Tilt/Swivel	Colour	Max. weight	Mounting pattern
PCASPRM-W	±35°/ 360°	White	Dedicated	Casio XJ-A Series
PCASXJMPRM-W	±35°/ 360°	White	Dedicated	Casio XJ-M Series

Projector security mounts

- Key-lock security for theft deterrence
- Universal tray pattern accommodates most projectors
- Two piece tray design with barrel key lock prevents access to security fasteners
- Easy access hinge designed for quick projector removal, enabling lamp and filter maintenance
- Top access hole for cable management
- Security fasteners included
- Available in black and white (-W) finishes

Compatible with both Peerless-AV Modular ceiling kits (see page 9) and Peerless-AV Pro ceiling kits (see page 41)

Technical Specifications				
Part No.	Tilt/Swivel/Roll	Colour	Max. weight	Mounting pattern
PSMU-PRS	+5°/-20°, 360°, ±10°	Black or White	11kg (25lbs)	Universal tray pattern

Projector enclosure

- Secures and protects virtually any projector and mount up to 508 x 508 x 280mm (w x d x h)
- Retro-fit capable without altering existing installation
- Adjustment bars accommodate projector lens placement
- For use with Peerless projector mounts, ceiling plates and extension poles
- 'Hook-n-Hang' feature allows hands-free operation during projector installation or maintenance
- Projector mount purchased separately
- Available in black or white (-W) finish

Compatible with both Peerless-AV Modular ceiling kits (see page 9) and Peerless-AV Pro ceiling kits (see page 41)

Technical Specifications		
Part No.	Colour	Universal for projectors
PE1120	Black or White	508x508x280mm (WDH)

Short throw projector mounts

PSTA-600

PSTK-1200

- Available as projector mount (**PSTA** models) or projector mount kit (**PSTK** models) with extended backplate
- Aluminium alloy telescoping arm with lock down slot
- Fully integrated cable management system conceals and protects cables for a clean finish
- Three different lengths to cover all short throw projectors
- Kitted with Peerless-AV PRG projector mount offering: +15/-20° Tilt, 360° Swivel, ±5° of Roll
- Wall plate with 254mm (10") of lateral shift and 152mm (6") of horizontal lift with PSTK models
- Wall plate covers conceal mounting plate fixings for clean and stylish appearance

Technical Specifications				
Part No.	Tilt/Swivel/Roll	Colour	Max. weight	Arm extension
PSTA-600	+15°/-20°, 360°, ±5°	Black and Silver	11kg (25lbs)	425mm - 600mm
PSTA-1200	+15°/-20°, 360°, ±5°	Black and SIlver	11kg (25lbs)	755mm - 1200mm
PSTA-1600	+15°/-20°, 360°, ±5°	Black and SIlver	11kg (25lbs)	1155mm - 1600mm
PSTK-600	+15°/-20°, 360°, ±5°	Black and SIlver	11kg (25lbs)	458mm - 633mm
PSTK-1200	+15°/-20°, 360°, ±5°	Black and SIlver	11kg (25lbs)	788mm - 1233mm
PSTK-1600	+15°/-20°, 360°, ±5°	Black and SIlver	11kg (25lbs)	1188mm - 1633mm

Short, ultra-short and extreme short throw projector arms

PSTKE-PRSU : Extreme-Short Throw

PSTK-PRSU : Short Throw

- Adjustable extension suitable for use with interactive white boards
- Quick-release mechanism allows fast projector install/removal for maintenance
- Security screws included to safeguard projector
- Universal adaptor plate for projectors up to 11kg and mounting pattern to 448mm
- Internal cable management with easy-access cover
- Key slots built into wall plate enable one-person installation
- Low-profile wall plate and high arm position allow installation into room with low ceilings
- Sturdy construction tested to hold over 75kg

Technical Specifications					
Part No.	Tilt/Swivel/Roll	Colour	Max. projector weight	Arm Length	Extension
PSTK-PRSU/WH	+5°/-20° / ±15° / ±10°	White	11kg (25lbs)	1404mm	1040mm to 1310mm*
PSTKU-PRSU/WH	+5°/-20° / ±15° / ±10°	White	11kg (25lbs)	719mm	320mm to 620mm*
PSTKE-PRSU/WH	+5°/-20° / ±15° / ±10°	White	11kg (25lbs)	394mm	160mm to 300mm*

** Actual projector throw distance is approximately 150-200mm shorter than extension measurement due to distance between centre of mount and front of projector lens.*

HD Flow wireless multimedia kit

ONE SOLUTION, ENDLESS POSSIBILITIES.

HD Flow Pro is simply the most versatile wireless solution for commercial and residential applications. Get full HD 1080p wherever it's needed with no strings attached. This highly flexible wireless solution provides endless possibilities, working with both digital and analogue signals, with any AV or IT device – computers, media servers, DVD players – no problem. And it easily streams up to full HD 1080p and passive 3D content to flat panels or projectors up to 131ft (30m), through walls, floors and ceilings. It can even multicast to up to four displays. This wireless workhorse is a project-saving kit for new installations and retrofits alike.

The most flexible wireless HD solution, works with both analogue and digital AV/IT sources

Flexible enough for residential installations, yet powerful enough for commercial applications

Provides optimum flexibility, making it a smart part of any integrator's "go-to" kit

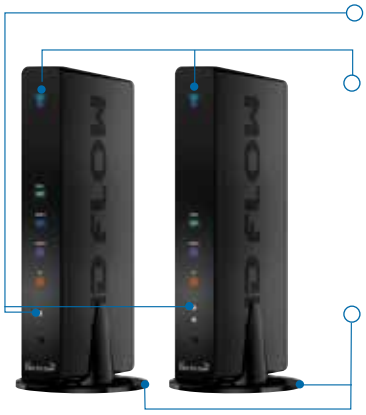

- Built-in IR does not require line-of-sight placement to control source devices such as DVR/set-top box, satellite box, Blu-ray™/DVD player, media server, VCR, game console
- HD Flow Pro's (802.11n) private network resists interference and network sharing from nearby wireless routers
- Full HD 1080p (60Hz) (24/30/60 fps) and passive 3D* signal flow, ideal for ultra-fast signal streaming
- Long range, high-quality streaming up to 131ft (40m) with no reduction of picture quality
- Multicast up to four HD Flow™ Pro Wireless Receivers**
- Small footprint makes it easy to fit the HD Flow Pro units into any application

Full HD 1080 HDMI 3D READY

* *Devices that are capable of supporting Full HD 1080p and passive 3D capabilities are needed.*

** *Requires additional Receiver units (HDS200-R).*

- Instant real-time transmission of Full HD media
- Transmits through walls and ceilings for multi-room streaming capability
- Four (4) output port options available Ideal for virtually any output device
- Plug in up to five (5) AV source devices and easily switch between them with the included remote control

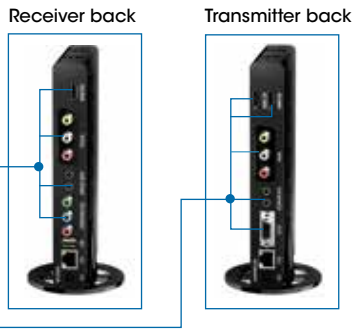

HD FLOW™
PRO WIRELESS MULTIMEDIA KIT

Inputs (Transmitter)

- 2 x HDMI
- 1 x Composite Video & Stereo Audio
- 1 x VGA: High Density 15-Pin D-Sub (RGB)
- AUDIO IN: - 1 x 3.5mm Audio Jack - 1 x Stereo RCA Audio Jack
- 1 x IR Port
- 1 x LAN (Ethernet): RJ45 Jack

Outputs (Receiver)

- 1 x HDMI
- 1 x Composite Video & Stereo Audio
- 1 x Component Video
- AUDIO OUT: - 1 x 3.5mm Audio Jack - 1 x Stereo RCA Audio Jack
- 1 x IR Port
- 1 x LAN (Ethernet): RJ45 Jack

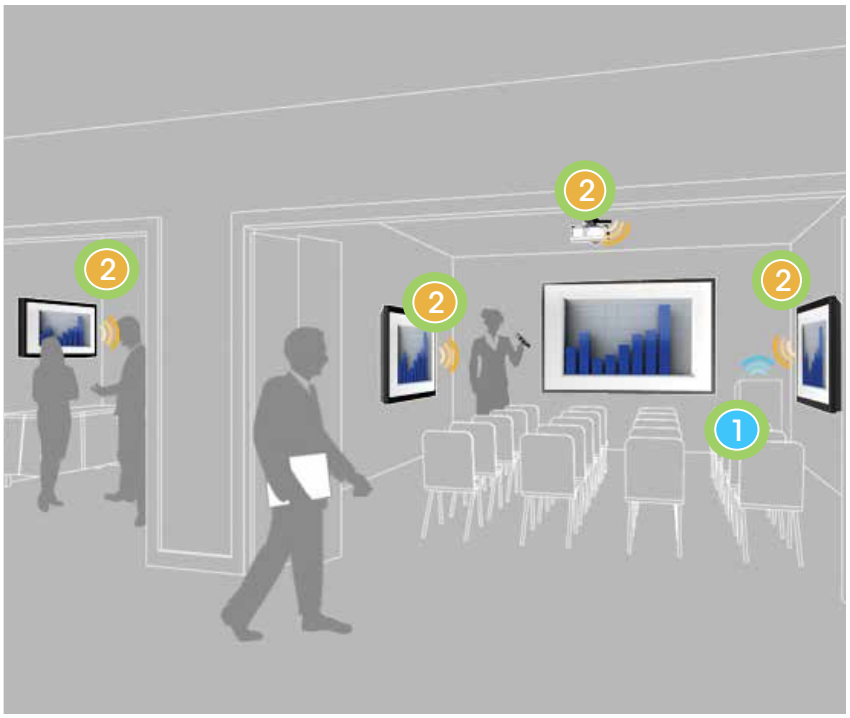

1 WIRELESS TRANSMITTER

Connect up to five source devices to the wireless Transmitter using the following inputs:

- Two HDMI inputs enable source devices as well as desktops or laptops that have HDMI capabilities (for Apple® computers use a DVI-to-HDMI or DisplayPort-to-HDMI adaptor).
- One composite input for analogue audio and video devices such as VCR or camcorder.
- One 3.5mm stereo jack for MP3, iPod or other audio devices.
- One VGA input for PC connection (for analogue devices that require component connection a component-VGA adapter is provided).

2 WIRELESS RECEIVER

Connect the Receiver to the display device to output streamed AV signal by using one of the following connections:

- One HDMI output for use with any HDMI enabled output device such as a display or projector. (Note: projectors not equipped with a HDMI port may require an HDMI-to-DVI adaptor).
- One composite output for use with analogue display devices such as older displays.
- One component output for analogue projectors and displays.
- One 3.5mm stereo output jack to send audio signal to the display device or external amplifier.

3 MULTICASTING

Wirelessly stream AV content to up to four HD Flow™ Pro Receivers using one Transmitter, making use of the the Multicast feature on any HD Flow™ Pro Wireless Multimedia Kit.

Multicast kits are available in two, three and four Receiver configurations with additional Receivers available to expand one, two & three receiver kits.

HDS200
HD Flow™ Pro
Wireless Multimedia Kit

HDS200-2
HD Flow™ Pro
Wireless Multimedia Kit
- Multicast: Two Recievers

HDS200-3
HD Flow™ Pro
Wireless Multimedia Kit
- Multicast: Three Recievers

HDS200-4
HD Flow™ Pro
Wireless Multimedia Kit
- Multicast: Four Recievers

Indoor information & wayfinding kiosks

NEW

With new interactive technologies like touch, gesture, dynamic media and mobile devices replacing traditional static information points in so many different vertical markets, it's no wonder that the relevant mounting solutions have been required to expand to cater for this opportunity. Introducing Peerless-AV's sleek digital signage kiosk range, designed to best support the latest ultra-thin LCD displays and touchscreen panels from 40" to 55".

Choose from a versatile array of sleek, slim and attractive kiosk enclosures that are sure to make an impact with your audience. Whether it's advertising, a digital directory or wayfinding, these solutions are an ideal fit for corporate, public transport, hospitality, education, hospital, retail store, shopping centre and many more applications.

This complete range includes solutions for single and back-to-back floor standing portrait screens, floor standing landscape kiosks and a secure desktop mount for iPad tablets. This is further complemented by a comprehensive selection of discreet on-wall and in-wall kiosks for 40" to 47" ultra-thin displays up to 57mm depth.

Products are supplied in silver finish as standard, however custom paint colours and vinyl wraps can be an option to complement existing aesthetics or to satisfy client branding requirements.

Contact Peerless-AV on 01923 200 100 or sales@peerless-av.co.uk for more information or to discuss custom quotations.

Portrait kiosk

NEW

- VESA® 200 x 200 up to 800 x 400mm compatible
- Eight-way tool-less adjustment to quickly position display in kiosk window for a flush alignment
- Accommodates ultra-thin or deeper commercial displays up to 101mm (4") thick, while accentuating slim kiosk design
- Secured front and back doors allow convenient access to the display, media player and other internal components for easy installation and maintenance
- Supports a wide range of aesthetic options including multiple colours, vinyl wraps, etc. to best match the environment or promote brand strategy
- Pre-assembled to simplify installation of entire solution

KIP746 (vinyl wrap)

Technical Specifications				
Model	Screen Size	Max Weight	Ext. size (w x h x d)	Display Window
KIP540	40"	34kg (75lb)	711 x 1829 x 521mm	499 x 888 mm
KIP542	42"	34kg (75lb)	711 x 1829 x 521mm	524 x 918 mm
KIP546	46"	34kg (75lb)	762 x 1829 x 521mm	574 x 1021 mm
KIP547	47"	34kg (75lb)	762 x 1829 x 521mm	586 x 1043 mm
KIP555	55"	34kg (75lb)	864 x 1984 x 521mm	697 x 1225 mm

Portrait back-2-back kiosk

NEW

- VESA® 200 x 200 up to 800 x 400mm compatible
- Eight-way tool-less adjustment to quickly position display in kiosk window for flush alignment
- Accommodates ultra-thin displays up to 46mm (1.83") thick to accentuate slim kiosk design
- Secured doors allow convenient access to the display, media player and other internal components for easy installation and maintenance
- Supports a wide range of aesthetic options including multiple colours, vinyl wraps, etc. to best match the environment or promote brand strategy
- Pre-assembled to simplify installation of entire solution

KIP555

Technical Specifications				
Model	Screen Size	Max Weight	Ext. size (w x h x d)	Display Window
KIP540B	40"	68kg (150lb)	711 x 1829 x 521mm	499 x 888 mm
KIP542B	42"	68kg (150lb)	711 x 1829 x 521mm	524 x 918 mm
KIP546B	46"	68kg (150lb)	762 x 1829 x 521mm	574x 1021 mm
KIP547B	47"	68kg (150lb)	762 x 1829 x 521mm	586 x 1043 mm
KIP555B	55"	68kg (150lb)	864 x 1984 x 521mm	697 x 1225 mm

Landscape kiosk

NEW

- VESA® 200 x 200 up to 600 x 400mm compatible
- Eight-way tool-less adjustment to quickly position display in kiosk window for a flush alignment
- Accommodates ultra-thin or deeper commercial displays up to 57mm (2.25") thick, while accentuating a slim kiosk design
- Hinged top frame offers easy access to display and other internal components for easy maintenance and enhanced security
- Supports wide range of aesthetic options including multiple colours, vinyl wraps, etc. to best match environment or promote brand strategy

KIL546 (Black)

Technical Specifications				
Model	Screen Size	Max Weight	Ext. size (w x h x d)	Display Window
KIL540	40"	34kg (75lb)	1105 x 1368 x 521mm	888 x 500 mm
KIL542	42"	34kg (75lb)	1105 x 1368 x 521mm	933 x 525 mm
KIL546	46"	34kg (75lb)	1194 x 1384 x 521mm	1021 x 574 mm
KIL547	47"	34kg (75lb)	1194 x 1384 x 521mm	1043 x 587 mm

iPad/Tablet desktop kiosk

NEW

- Designed specifically for iPad, iPad2 and iPad with retina display
- No interference with WiFi, Bluetooth or 3G/4G communication
- Slim 54mm profile complements the thin client tablet design
- 24+ hours of estimated battery life is longest on the market, when used with an external battery system accessory. (Actual battery performance may vary based on: wireless connectivity, application usage, brightness setting, etc.)
- Bolts to mounting surface or secures with high bond, double-sided tape to any solid surface without need for drilling or damaging the surface
- Supports wide range of aesthetic options including multiple colours, vinyl wraps, etc. to best match environment or promote brand strategy
- Pre-assembled

KIP410I (custom colour)

Technical Specifications				
Model	Screen Size	Max Weight	Ext. size (w x h x d)	Display Window
KIP410I	iPad, iPad 2 & retina iPad	2.2kg (5lb)	199 x 398 x 110mm	148 x 198mm

Wall kiosk

NEW

- VESA® 200 x 200 up to 600 x 400mm compatible
- Eight-way tool-less adjustment to quickly position display in kiosk window for flush alignment
- Accommodates ultra-thin displays up to 57mm (2.25") thick to accentuate slim kiosk design
- Low profile design extends 101mm (3.96") away from the wall
- Hinged top frame offers easy access to display and other internal components for easy maintenance and enhanced security
- Supports wide range of aesthetic options including multiple colours, vinyl wraps, etc. to best match environment or promote brand strategy

KIL647 (custom colour)

Technical Specifications				
Model	Screen Size	Max Weight	Ext. size (w x h x d)	Display Window
KIP640	40" Port	34kg (75lb)	686 x 1105 x 124mm	500 x 888mm
KIP642	42" Port	34kg (75lb)	686 x 1105 x 124mm	525 x 933mm
KIP646	46" Port	34kg (75lb)	737 x 1194 x 124mm	574 x 1021mm
KIP647	47" Port	34kg (75lb)	737 x 1194 x 124mm	587 x 1043mm
KIL640	40" Land	34kg (75lb)	1105 x 686 x 124mm	888 x 500mm
KIL642	42" Land	34kg (75lb)	1105 x 686 x 124mm	933 x 525mm
KIL646	46" Land	34kg (75lb)	1194 x 737 x 124mm	1021 x 574mm
KIL647	47" Land	34kg (75lb)	1194 x 737 x 124mm	1043 x 587mm

In-wall kiosk

NEW

- VESA® 200 x 200 up to 600 x 400mm compatible
- Eight-way tool-less adjustment to quickly position display in kiosk window for flush alignment
- Accommodates ultra-thin displays up to 57mm (2.25") thick to accentuate slim kiosk design
- Removable front cover and pull-out mount offers easy access to the display and other internal components for easy maintenance and enhanced security
- Low profile design extends 25mm (1.0") away from the wall
- Supports wide range of aesthetic options including multiple colours, vinyl wraps, etc. to best match environment or promote brand strategy

KIL746-S

Technical Specifications				
Model	Screen Size	Max Weight	Ext. size (w x h x d)	Display Window
KIP740	40" Port	34kg (75lb)	734 x 1153 x 143mm	500 x 888mm
KIP742	42" Port	34kg (75lb)	734 x 1153 x 143mm	525 x 932mm
KIP746	46" Port	34kg (75lb)	810 x 1280 x 143mm	574 x 1021mm
KIP747	47" Port	34kg (75lb)	810 x 1280 x 143mm	587 x 1043mm
KIL740	40" Land	34kg (75lb)	1153 x 734 x 143mm	888 x 500mm
KIL742	42" Land	34kg (75lb)	1153 x 734 x 143mm	933 x 525mm
KIL746	46" Land	34kg (75lb)	1280 x 810 x 143mm	1021 x 574mm
KIL747	47" Land	34kg (75lb)	1280 x 810 x 143mm	1043 x 587mm

Menu board system

Simple Selection, Simple Installation, Simply Seamless

Expand your options for linear display installations by utilising the new Digital Menu Board System from Peerless-AV. This innovative system enables simple and customisable mount selection to your specific requirements, with the added benefit of easy installation resulting in a seamless, in-line array of flat panel displays.

Supporting virtually any digital signage or menu board system - from a dual screen to a limitless row of screens - this seamless multi-screen mounting solution opens up a multitude of installation possibilities for any market from transportation information arrays to QSR menu displays.

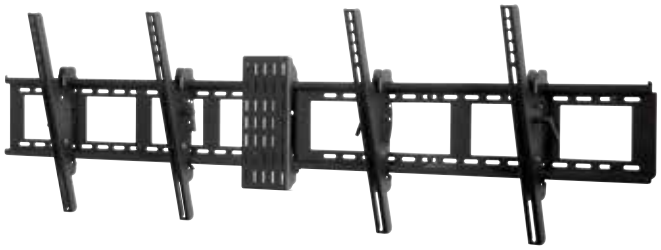

- Designed to support two or more screens in portrait or landscape orientation
- Perfectly aligns multiple horizontal screens without the need for complicated measurements
- Flat or tilt screen mounting option available with tilt of +15° / -5° for ideal viewing angle, even when installed above head height
- Cable management accessory available for a clean clutter-free installation
- Expandable with attachment points to accommodate additional screens
- On-line **'Menu Board Mount Configurator'** available to create specific linear display system for 2 or more screens using the least number of components

To build your own menu board visit menuboard.peerless-av.com

Media player storage mounts

DMU50SM

DST660

DS508

DST995

Peerless-AV offer a wide range of media player holders/mounts to suit all sizes of players. Perfect for Digital Signage & Public area installs, these mounts provide security & clean aesthetics. Engineered for strength, durability and easy installation, wall or ceiling mount options are available. The mounts offer quick service and are designed for a snug fit.

- Houses media controller, graphics driver or computer
- Provides ventilation space to help prevent overheating
- Media controller, graphics driver or computer can be removed and serviced without the removal of the screen
- Internal cable management hides cables for a clean, clutter-free appearance
- 'Kick-stand' feature (DS508) props screen upwards enabling easy access to cables and for maintenance
- Requires separate screen adaptor for mounting pattern larger than VESA® 200x200mm
- For the latest media player storage mounts visit www.peerless-av.com

Model	Internal dims	External dims	VESA®	Max Weight	Tilt	Wall/Ceiling
DS508	378 x 337 x 100mm	464 x 350 x 121mm	100, 200x100, 200	91kg	+5°, +10°	Wall
DS509	378 x 229 x 51mm	464 x 261 x 70mm	100, 200x100, 200	91kg	+5°, +10°	Wall
DST360	381 x 229 x 76mm	472 x 419 x 109mm	100, 200x100, 200, 300	68kg	±20°	Wall/Ceiling
DST660	304 x 330 x 60mm	470 x 436 x 72mm	200x100 up to 400x400mm	57kg	+10° fixed at 3.5 or 7.5°	Wall
DMU50SM	165 x 165 x 44mm	762 x 458 x 68mm	Up to 700 x 400mm	57kg	n/a	Wall
DS246	287 x 241 x 63mm	300 x 256 x 69mm	Requires PLP	22kg	+12°	Wall
DS415	358 x 275 x 91mm	457 x 311 x 107mm	100, 200x100, 200	68kg	+10°	Wall
DST995	426 x 294 x 81mm	406 x 279 x 83mm	200x200 up to 400x400mm	102kg	+15°	Ceiling
DSX750	241 x 197 x 63mm	312 x 310 x 92mm	100, 200x100, 200	*wall mount	n/a	Wall

Trolleys & stands

Peerless-AV's sleek and stylish trolleys and stands are designed to provide the ideal display viewing position and match the décor of any environment - boardrooms, training rooms, lobbies, classrooms, auditoriums or exhibition halls. A full line-up of accessories offers each stand the functionality to be tailored to meet specific requirements; whether video conferencing in a boardroom or presenting on a trade show floor.

All models boast internal cable management to conceal all unsightly wires for a clean appearance and have the option of theft-deterrent screen mounting hardware for added security in public areas. Other features of specific models include the ability to add additional adaptors to mount extra screens (either stacked or back-to-back) and height adjustment along the main column length. This versatile and adaptable range is ideal solution to all your free standing and mobile AV requirements.

Floor stand for up to 70" flat panel displays

- Fits single or back-to-back up to 70" displays (up to four with additional dual-display cartridge)
- Portrait or landscape orientation
- Height adjustable on 1829mm (72") poles
- Internal cable management for a clean, clutter-free appearance
- Accommodates non-VESA® displays with additional PLP adaptor (sold separately)
- Hook-on design for quick and simple installation

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
FPZ-600	Up to 70"	91kg (200lbs) per display	Up to VESA® 200

Trolley for up to 90" displays

NEW

- Supports flat panel screens up to 90" with max mounting pattern 965 x 433mm
- Twin column design for added stability to accommodate up to 136kg
- Incremental tilt of -2°, 0° and +5° locks in position for ideal viewing angle
- Internal cable management for clean & stylish appearance
- Manoeuvres easily on 4" swivel castors for exception portability

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SC590	Up to 90"	136kg (300lbs)	Up to 800x400mm

Floor stand for up to 90" flat panel displays

- Enclosure built into base is designed to conceal and protect media player
- Portrait or landscape orientation
- Height adjustable on 1829mm (72") poles
- Hook-on design allows display to rest in place while display is secured
- Internal cable management for a clean, clutter-free appearance
- Accommodates non-VESA® displays with additional PLP adaptor (sold separately)

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
FPZ-670	Up to 90"	91kg (200lbs) per display	Up to VESA® 200

Pedestal mount for 32-50" displays

- 15° forward tilt for viewing flexibility
- 360° swivel with swivel stop
- Portrait or landscape orientation without removing screen
- Internal cable management
- Concrete floor anchors included
- Universal PLP adaptor required

COL510P - 1524mm (60") height
COL610P - 1829mm (72") height
COL710P - 2134mm (84") height
COL810P - 2438mm (96") height

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
COL...P	32-50"	68kg (150lbs)	Requires PLP Adaptor

Floor stand for up to 65" flat panel displays

- Black (**P** model) or Silver (**P-S** model) finish with two tinted shelves
- Incremental tilt of -2°, 0° and +5°
- Continuous vertical adjustment on 1465mm (57.66") upright
- Adjustable tempered glass shelves hold AV components
- Internal cable management for a clean, clutter-free appearance
- Universal adaptor plate up to VESA® 600x400mm included

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SS550P/-S	Up to 65"	68kg (150lbs)	Up to VESA® 600x400mm

Floor stand for up to 65" flat panel displays

- Floor stand can be bolted down
- Incremental tilt of -2°, 0° and +5°
- Continuous vertical adjustment on 1567mm (61.68") upright
- Internal cable management for a clean appearance
- VESA® Pattern: 200 and 300mm included, universal PLP adaptors available separately for non-VESA patterns

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SS560F	Up to 65"	72.5kg (160lbs)	VESA® 200 & 300mm

Floor stand for 32-65" flat panel displays

- Black (**DPB** model) or Chrome (**DPS** model) poles
- Floor stand can be bolted down
- Incremental tilt of -2°, 0° and +5° that locks at chosen viewing angle
- Continuous vertical adjustment on 1625mm (65")
- VESA® Pattern: 200 and 300mm included, universal PLP adaptors available separately for non-VESA patterns
- Internal cable management to conceal unsightly wires

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SS560DPB/DPS	32-65"	72.5kg (160lbs)	VESA® 200 & 300mm

Trolley for up to 65" flat panel displays

- Black (**DPB** model) or Chrome (**DPS** model) poles
- Incremental tilt of -2°, 0° and +5° that locks at chosen viewing angle
- Continuous vertical adjustment on 1422mm (56") poles
- Easy manoeuvrability with 102mm (4") swivel casters, two locking
- VESA® Pattern: 200 and 300mm included, universal PLP adaptors available separately for non-VESA patterns
- Internal cable management to conceal unsightly wires

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SC560DPB/DPS	Up to 65"	68kg (150lbs)	VESA® 200 & 300mm

Trolley for up to 46" flat panel displays

NEW

- Compact black trolley with toughened glass base and shelf
- Effortless display height adjustment of 300mm (12") provided by an integrated gas strut
- Display tilt adjustment of +10°/-5° for desired viewing angle
- Universal mounting pattern from 200 x 200mm up to 500 x 400mm
- Adjustable tempered glass shelf for AV components and accessories
- Integrated cable management protects, contains and conceals cables for a clean, professional installation
- 2" (51mm) swivel castors with two locking casters

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SC551GL	Up to 46"	41kg (91lbs)	Up to VESA® 500x400mm

Trolley for up to 46" flat panel displays

- Black trolley with toughened glass shelf
- Display tilt adjustment +10°/-5° for desired viewing angle
- Simple tool-less height adjustment of 300mm (11.8")
- Adjustable glass shelf for AV components & accessories
- Internal cable management system to conceal unsightly wires
- Ease of movement with 50mm (2") swivel casters, two of them locking
- Universal adaptor plate from 200x200mm

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SC550	Up to 46"	68kg (150lbs)	Up to 500x400mm

Floor stand for 32-65" flat panel displays

- Adjustable metal (**M** model) or tempered glass (**G** model) shelf for AV components & accessories
- Incremental tilt of -2°, 0° and +5° for ideal viewing angle
- Continuous vertical adjustment on 1520mm (59.84") upright
- Adjustable feet to help compensate for uneven surfaces
- Internal cable management for a clean appearance
- Universal adaptor plate up to VESA® 600x400mm included

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SS560M/G	32-65"	113kg (250lb)	Up to VESA® 600x400mm

Trolley for 32-65" flat panel displays

- Adjustable metal (**M** model) or tempered glass (**G** model) shelf for AV components & accessories
- Incremental tilt of -2°, 0° and +5° for ideal viewing angle
- Continuous vertical adjustment on 1520mm (59.84") upright
- Manoeuvres easily on 102mm (4") swivel casters, two locking
- Universal adaptor plate up to VESA® 600x400mm included

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SR560M/G	32-65"	113kg (250lbs)	Up to VESA® 600x400mm

Floor Stand for up to 65" flat panel displays

- Stylish 83mm (3.25") aluminium column
- Up to 30° tilt for perfect viewing angle
- Space below display for computer or media box and allows access without having to remove the display
- Internal cable management for a clean, clutter-free appearance

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SS560FK	Up to 65"	68kg (150lbs)	Up to VESA® 600x400mm

Trolley for up to 65" flat panel displays

- Stylish 83mm (3.25") aluminium column
- Up to 30° tilt for perfect viewing angle
- Space below display for computer or media box and allows access without having to remove the display
- Ease of movement with 102mm (4") swivel casters, 2 locking
- Internal cable management for a clean, clutter-free appearance

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
SC560FK	Up to 65"	68kg (150lbs)	Up to VESA® 600x400mm

Base shelf

- Compatible with SR560G(M); SC560FK

Part No: ACC315 **Colour**: Black
Max Weight: 23kg (50lbs)

Accessory shelf

- Attaches to twin poles of FPZ600 stand

Part No: ACC325 **Colour**: Black
Max Weight: 11kg (25lbs)

Video conferencing shelf

- Mounts to SR560G(M); SS560G(M); SS560F;SS560DPB(S); SC560DPB(S)

Part No: ACC319 **Colour**: Black
Max Weight: 23kg (50lbs)

Metal shelf

- Mounts to column of SR560G(M); SS560G(M); SS560F; SC560FK; SS560FK

Part No: ACC313 **Colour**: Black
Max Weight: 23kg (50lbs)

Laptop arm

- Mounts to column of SR560G(M); SS560G(M); SS560F; SC560FK; SS560FK

Part No: ACC315 **Colour**: Black
Max Weight: 4.5kg (10lbs)

Tempered glass shelves

- Tempered glass shelf designed to support AV components and accessories

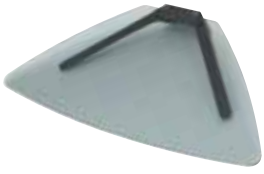

Part No: ACC318 **Colour**: Black
Max Weight: 23kg (50lbs)

Environmental enclosures

Let's take this outside!

If you're looking to install worry-free outdoor digital signage, with the largest selection of corrosion-resistant mounts and display enclosures, we've got you covered. Peerless-AV is your complete source for durable, secure mounts and enclosures that will withstand extreme punishment from moisture, sun, salt and humidity and keep outdoor AV equipment well-protected.

Protection from the outdoor elements, pollution, theft and vandalism is inherently built into the steel and corrosion resistant enclosure, along with tubular keyed compression locks and shatter-proof tempered glass window for added security.

Rated to IP56, these enclosures are waterproof against direct powerful water jets (100l per minute) and sealed with a rubber gasket to exclude the ingress of dust and particles in sufficient quantity to prevent interference with equipment operation. This level of protection, combined with thermostatically heated and fan-cooled options, ensure the display will continue to function in the most extreme outdoor conditions.

Peerless enclosures are perfect for a full range of applications from entertainment venues, bars and restaurants to stadium, shopping centre and outdoor advertising locations. Access to the enclosure enables quick and effective servicing or replacement of screens to prevent unwanted 'down-time' in hard to access locations.

- E-coat protection covers entire enclosure with a unique ability to resist chipping, scratching, rusting and UV rays
- IP56 rated for exceptional protection against the ingress of moisture and small particles to maintain AV equipment performance
- Triple corrosion protection with galvannealed cold rolled steel, zinc powder primer & powder paint
- Available in fan cooled (**F**) or heated (**FH**) model options with thermostat controlled fans to ensure proper air circulation and heat ventilation
- Shatter-proof tempered glass window
- Incremental depth adjustment allows for ideal screen placement of 12.7mm (0.5") from interior window

e COAT PROTECTED

WEATHER RESISTANT

IP 56 RATED

Technical Specifications					
Part No.	Screen Size	Max. weight	Climate control	Finish	Mounting Pattern
FPE42F-EU-S / FPE42F-UK-S	40" - 42"	113kg (250lbs)	Cooling Fans	Stone Gray	730 x 433mm
FPE42FH-EU-S / FPE42FH-UK-S	40" - 42"	113kg (250lbs)	Thermostat Heating & Cooling	Stone Gray	730 x 433mm
FPE47F-EU-S / FPE47F-UK-S	46" - 47"	113kg (250lbs)	Cooling Fans	Stone Gray	730 x 433mm
FPE47FH-EU-S / FPE47FH-UK-S	46" - 47"	113kg (250lbs)	Thermostat Heating & Cooling	Stone Gray	730 x 433mm
FPE55F-EU-S / FPE55F-UK-S	52" - 55"	113kg (250lbs)	Cooling Fans	Stone Gray	730 x 433mm
FPE55FH-EU-S / FPE55FH-UK-S	52" - 55"	113kg (250lbs)	Thermostat Heating & Cooling	Stone Gray	730 x 433mm

Corrosion resistant tilt wall mount

- For Indoor/Outdoor use where corrosion protection and weather resistance needed
- One touch tilt allows adjustment of +15/-5° with optional tilt lock in 5° increments
- Horizontal screen adjustment up to 203mm (8″) for better display placement
- Security hardware and optional lock down channels to add a pad lock additional security
- Wood, concrete or breeze block mounting
- Available in Black and Stone Grey (-S) colour options

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mounting pattern
EPT650	32-55″	Black/Grey	79kg (175lbs)	Up to 600 x 400mm

Corrosion resistant articulating mount

- Indoor/outdoor corrosion protection and weather resistance
- Three adjustable pivot points for versatile positioning with +15°/-5° tilt, 90° swivel
- Arm extends to 531mm (20.9″) from the wall and retracts to 110mm (4.3″) depth
- Screen side and wall side security hardware included
- Wood, concrete and breeze block mounting hardware included
- Available in Black and Stone Grey (-S) colour options

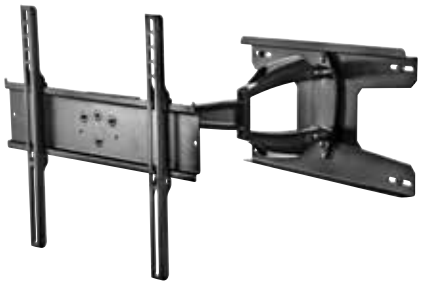

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mounting pattern
ESA746PU	26-46″	Black/Grey	36kg (80lbs)	Up to 400 x 400mm

Corrosion resistant articulating mount

- Indoor/outdoor corrosion protection and weather resistance
- Works in portrait or landscape orientation
- Dual arm construction for added strength with +15°/-5° tilt, 90° swivel
- Arm extends to 700mm (27.5″) from the wall and retracts to 110mm (4.3″) depth
- Display levelling facility with ±5 roll after mounting
- Rotate from portrait to landscape orientation without removing the display

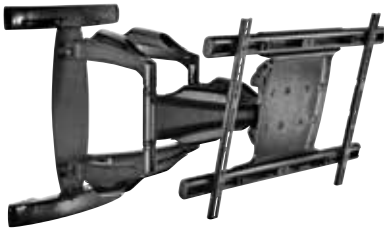

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mounting pattern
ESA763PU	37-63″	Black	91kg (200lbs)	Up to 600 x 400mm

Wind rated tilt wall mount

- Wall mount designed specifically for outdoor digital signage to withstand a full range of environmental conditions
- Constructed from weather proof materials, with special e-coating (as used in the automobile industry) to protect against corrosion
- Mount is wind rated up to 110mph when fixed tilt mechanism is engaged
- Easy fixed tilt settings of 0°, 2°, 5°, 10° and 15° enable the perfect viewing angle when positioned at any height
- Hook-and-hang design makes installation quick and easy in any setting
- Available in Black or Stone Grey (-S)

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Mounting pattern
EWMU	32-65″	Black/Grey	91kg (200lbs)	Up to 720 x 449mm

Wind rated tilt ceiling mounts

- Constructed from weather proof materials, with special e-coating (as used in the automobile industry) to protect against corrosion
- Available with I-beam **(..-I-S)** or concrete **(..-C-S)** mounting plate options
- Mount is wind rated up to 110mph when fixed tilt mechanism is engaged
- Available with 4 column lengths for a drop of up to 4 foot from ceiling to screen centre
- Easy fixed tilt settings of -5°, 0°, 5°, 10° and 15°
- Swivel feature allows the screen to face the required direction without adjusting mount

Technical Specifications				
Part No. *	Screen Size	Colour	Max. weight	Drop (ceiling to screen centre)
ECMU-01..	32-65″	Black/Grey	91kg (200lbs)	457mm (18″)
ECMU-02..	32-65″	Black/Grey	91kg (200lbs)	610mm (24″)
ECMU-03..	32-65″	Black/Grey	91kg (200lbs)	914mm (36″)
ECMU-04..	32-65″	Black/Grey	91kg (200lbs)	1289mm (48″)

** Part Number ..-I-S for I-beam mounting plate & ..-C-S for concrete mounting plate*

Wind rated tilt pedestal mounts

- Pedestal mount designed specifically for outdoor digital signage to withstand a full range of environmental conditions. Constructed from weather proof materials, with special e-coating to protect against corrosion
- Mount is wind rated up to 110mph when fixed tilt mechanism is engaged
- Available with 4 pedestal lengths for a height of up to 8 foot from the base to screen centre
- Easy fixed tilt settings of 0°, 2°, 5°, 10° and 15° enable the perfect viewing angle when positioned at any height
- Swivel feature allows the screen to face the required direction without adjusting mount
- Universal mounting pattern for flat panel screens from 32″ to 65″ up to VESA 700 x 400mm
- Available in Black or Stone Grey (-S)

Technical Specifications				
Part No.	Screen Size	Colour	Max. weight	Height (base to screen centre)
EPMU-05-S	32-65″	Black/Grey	91kg (200lbs)	1524mm (60″)
EPMU-06-S	32-65″	Black/Grey	91kg (200lbs)	1800mm (72″)
EPMU-07-S	32-65″	Black/Grey	91kg (200lbs)	2133mm (84″)
EPMU-08-S	32-65″	Black/Grey	91kg (200lbs)	2438mm (96″)

Monitor & Tablet mounts

Positioning a monitor or tablet to a users ideal viewing position and optimising their work area is quick and simple using a Peerless-AV mount.

All models are ergonomically designed for optimum screen placement and many include features such as smooth motion articulating arms for the easiest height, depth and tilt adjustment contributing to reduced eye and neck strain.

Increase productivity by freeing up desk space and more efficient display positioning with models capable of supporting up to four screens on a single mount. Installation is quick and easy, securing a display with a quick release mechanism, whilst many models include internal cable management for a clean, uncluttered appearance.

Universal tablet cradle

- Adjustable height and width, providing a universal fit for most tablets
- Easily attaches to any 75 x 75mm VESA® mount
- Stylish cover for improved aesthetics
- Available in Black or Silver (-S) finish to complement tablet design

Technical Specifications				
Part No.	Tablet Size	Max. weight	Finish	Mounting pattern
PTM200	Universal	2.27kg (5lbs)	Black/Silver	Adjustable

Universal desktop tablet mount

- Adjustable height and width, providing a universal fit for most tablets
- Stylish cover for improved aesthetics
- ±30° of One-Touch™ tilt and swivel
- 360° of roll enables move from landscape to portrait orientation
- Option to lock in place with theft resistant security screws
- Available in black or white (-W) finish to complement tablet aesthetics

Technical Specifications				
Part No.	Tablet Size	Max. weight	Finish	Mounting pattern
PTM400	Universal	2.27kg (5lbs)	Black/Silver	Adjustable

Floor Stand for iPad Tablets

NEW

- Lightweight and durable signage solution for tablets in temporary or permanent use
- Optimised for tablets such as the iPad2, iPad3, or iPad with Retina display
- Quickly rotates from landscape to portrait with the release of the spring pin
- Internal cable management creates an aesthetically pleasing appearance
- Socket pin security screws keep the tablet secured within the enclosure
- Base can be free standing or bolted to the floor to increase security

Technical Specifications			
Part No.	Max. weight	Finish	Mounting pattern
PTS510I	2.3kg (5lbs)	Black / Silver / White	Portrait / Landscape

Desktop mount for single screens

- Desk clamp & grommet mount option
- Aluminium cast arm provides sturdy and durable support
- ±40° tilt, 180° swivel, 360° roll
- Height adjustable 320mm (12.6") on post
- Cable management clips keep cables out of the way

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
LCT100S	12-30"	9kg (20lbs)	VESA® 75, 100

Articulating desktop mount for LCD screens

- Suitable for desk mounting LCD screens 10-30" in size
- Extension arm with three pivot points for up to 360° pan, ±60° tilt
- Mounting options for all surfaces (desk clamp and desk bolt) included
- Up to 360° roll adjustment allows screen to be displayed in landscape or portrait orientation
- Compact retractable design increases workspace
- Durable gas strut and ball-joint system for smooth, stable operation
- Die cast aluminium construction
- Black finish

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
LCT-101	10-30"	11kg (25lbs)	VESA® 75, 100

Single arm desktop mount

- Desk clamp & grommet mount option included
- Tilt: +80/-10° (monitor) ±45° (arm), 180° swivel, 360° roll
- Height adjustable 320mm (12.6") on post, arm extends up to 417mm (12.6")
- Internal cable management routes cables inside arm
- Cast aluminium arm for durable and sturdy support
- Also available as wall mount version (LCW620A) to save additional desk space

LCW420A

LCT420A

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
LCT420A	Up to 30"	7kg (15lbs)	VESA® 75, 100
LCW420A	Up to 30"	7kg (15lbs)	VESA® 75, 100

Dual arm desktop mount

- Desk clamp & grommet mount option included
- Tilt: +80/-10° (monitor) ±45° (arm), 180° swivel, 360° roll
- Height adjustable 320mm (12.6") on post, arms extends up to 584mm (23.0")
- Internal cable management routes cables inside arms
- Cast aluminium arm for durable and sturdy support
- Also available as wall mount version (LCW620A) to save additional desk space

LCW620A

LCT620A

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
LCT620A	Up to 30"	7kg (15lbs)	VESA® 75, 100
LCW620A	Up to 30"	7kg (15lbs)	VESA® 75, 100

Dual arm desktop mount for twin monitors

- Desk clamp & grommet mount option included
- Tilt: +80/-10° (monitor) ±45° (arm), 180° swivel, 360° roll
- Height adjustable 320mm (12.6") on post, arms extends up to 584mm (23.0")
- Internal cable management routes cables inside arms
- Cast aluminium arm for durable and sturdy support
- Also available as wall mount version (LCW620AD) to save additional desk space

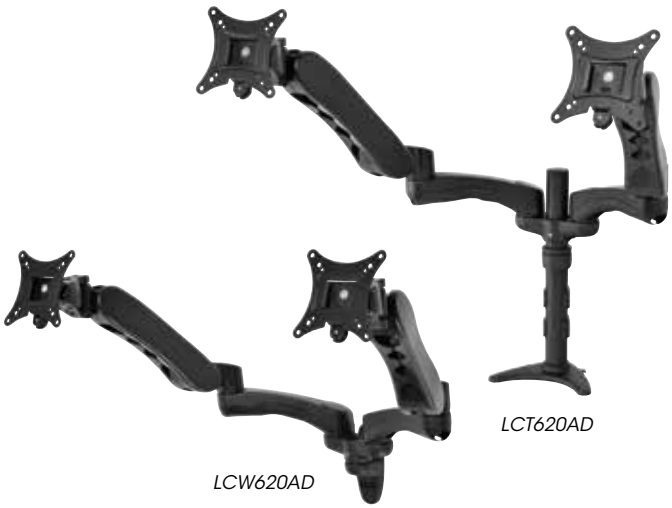

LCT620AD

LCW620AD

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
LCT620AD	Up to 30"	7kg (15lbs) per arm	VESA® 75, 100
LCW620AD	Up to 30"	7kg (15lbs) per arm	VESA® 75, 100

Desktop mount for dual monitors

- Supports two 30″ displays on a 900mm (35.4″) crossbar
- Easy to assemble and base requires 0.19m² (2 sq.ft.) of desktop space
- Height adjustable by 305mm (12″) for the ideal viewing point
- Move displays freely along the vertical rail without tools
- Integrated cable management for a clean and uncluttered desktop
- 360° roll adjustment

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
LCZ-2F430B	Up to 30″	9kg (20lbs) per screen	VESA® 75, 100

Desktop mount for triple monitors

- Supports three 19″ displays on a 900mm (35.4″) crossbar
- Easy to assemble and base requires 0.19m² (2 sq.ft) of desktop space
- Height adjustable by 305mm (12″) for the ideal viewing point
- Move displays freely along the vertical rail without tools
- Integrated cable management for a clean and uncluttered desktop
- 360° roll adjustment

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
LCZ-3F419B	Up to 19″	9kg (20lbs) per screen	VESA® 75, 100

Desktop mount for quad monitors

- Accommodates four 24″ monitors that measure up to 355-762mm wide by 304-431mm high
- Easy to assemble and base requires 0.19m² (2 sq.ft) of desktop space
- Height adjustable by 609mm (24″) for the ideal viewing point
- Move displays freely along the vertical rail without tools
- Integrated cable management

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
LCZ-4F430B	Up to 24″	9kg (20lbs) per screen	VESA® 75, 100

Desktop mount for quad monitors

- Accommodates four 24″ monitors that measure up to 355-762mm wide by 304-431mm high
- Through desk grommet fixing reduces desk space required
- Height adjustable by 609mm (24″) for the ideal viewing point
- Move displays freely along the vertical rail without tools
- Integrated cable management

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
LCZ-4F4G30B	Up to 24″	9kg (20lbs) per screen	VESA® 75, 100

Desktop swivel mount for up to 47″ displays

NEW

HP447

- Secure, functional and sleek desktop mount for hospitality applications
- Built-in swivel up to 360° allows for optimum viewing angle
- Base stand bolts down for safety and security
- Adjustable height allows for greater flexibility
- Cable management internally through the mount and down through the mounting surface
- Security screws prevent tampering and theft

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
HP432-002	22-40″	36kg (80lbs)	VESA® 100, 200x100 & 200
HP447	32-47″	34kg (75lbs)	VESA® 200x100, 200 x200

Desktop swivel mount for up to 55″ displays

NEW

HP455

- Secure, functional and sleek desktop mount for hospitality applications
- Built-in swivel up to 360° allows for optimum viewing angle
- Base stand bolts down for safety and security
- Adjustable height allows for greater flexibility
- Cable management internally through the mount and down through the mounting surface
- Security screws prevent tampering and theft

Technical Specifications			
Part No.	Screen Size	Max. weight	Mounting pattern
HP450	32-50″	69kg (150lbs)	Up to VESA® 600 x 400
HP455	32-55″	34kg (75lbs)	Up to VESA® 400 x 400

Healthcare & medical NEW

From consultation room or an operating theatre to a patient room or the hospital reception area, PeerCare™ antimicrobial mounting solutions are an effective method to deliver important medical information to staff, wayfinding to visitors and entertainment to patients.

With versatile wall mounts for any location, ceiling mounts to save precious floor space, desktop mounts ideal for workstations and trolleys as a mobile solution for multiple locations the PeerCare range has an answer for every application and mounting challenge.

All PeerCare mounts are treated with an Agion® antimicrobial finish which inhibits the growth of bacteria, mould and fungus on the surface of the product, thereby controlling the spread of infection within healthcare institutions.

agion®

What does Agion branded protection mean? It means the naturally antimicrobial properties of silver are built right into your product for long lasting protection. Agion technology operates at the surface of a product through the controlled release of elemental ions which attack microbes and inhibit their growth in three different ways.

Wall Mounts

PeerCare™ antimicrobial wall mounts deliver flexibility for how and where vital information can be displayed throughout any healthcare facility. Available in flat mount, tilt mount and articulating mount models, PeerCare mounts offer durability, ease of installation and smooth operation while keeping flat panels or monitors close to the wall and out of the way when not in use.

A wide range of SmartMount models are available with antimicrobial black or white finish – see page 12 for information on the full range

Ceiling mounts

In emergency departments, small examination rooms or operating theatres, there is a lot of equipment and not a lot of floor space. Our two straight-drop ceiling-mount options and extension columns accommodate displays from 32" to 61" and position screens safely and securely where they are easy to view and close to the point-of-care.

Ceiling mount kit available in antimicrobial black or white finish – see page 48 for information on the components in the range

Desktop mounts

Mount from one to four monitors to desktops in the nursing station, diagnostic area or wherever you need a close-up view of patient information. Add the flexibility of adjustable viewing angles and levels with articulating desktop or wall arm mounts. PeerCare™ offers the healthiest range of quality, convenient desktop mounts and arms for everyday tasks.

A wide range of Desktop models are available in a standard black finish – see page 42 for details

Trolley & Kiosk

One is stationery. One is mobile. Both provide a forum for vital information where you need it. PeerCare's wayfinding kiosk is the modern, attractive way to help visitors navigate hospitals, medical centers and other healthcare facilities. The large screen display cart, treated with Agion® anti-microbial coating goes from the bedside, to a consultation room or conference facility without taking germs with it.

SR560 & KIL540 models are available in antimicrobial black or white finish – see pages 39 & 35 for details

Universal Adaptor Plates

PLP-UNL

Model	Screen Size	Weight	Mounting Pattern
PLP-UNM	22-46"	68kg	438 x 329mm
PLP-UNL	32-65"	90kg	729 x 433mm
PLP-UN1	37-50"	68kg	701 x 400mm

Dedicated Adaptor Plates

PLP-V8X4

Model	VESA® Pattern	Model	VESA® Pattern
PLP-V3X3	300x300mm	PLP-V4X4	400x400mm
PLP-V4X2	400x200mm	PLP-V6X4	600x400mm
PLP-V4X3	400x300mm	PLP-V8X4	800x400mm

Accessory adaptor rails

ACC-DSVW8x4

ACC-V800X

Model	Max Weight	Mounting pattern
ACC-DSVW8x4	57kg	Converts DS mounts 800x400mm
ACC-V800X	59kg	Convert 400x400 to 800x400 & 1000x400mm

Cable management column

- Can also be used for video conferencing applications
- Perfect to conceal unsightly cables from wall mounted flat panels

Part No: ACWAC1/BK **Colour:** Black
Length: 300mm (12") **Depth from wall:** 38mm (1.5")
Part No: ACWAC1/SI **Colour:** Silver
Length: 300mm (12") **Depth from wall:** 38mm (1.5")

AV component shelf

- Perfect for domestic or corporate video conferencing applications
- Designed to work with Peerless Cable Management Column for a complete AV support system

Part No:	ACWAS1/BK
Colour:	Black
Max weight:	10kg (22lbs)
Overall size:	419 x 304mm

Adjustable shelf for AV components

- Versatile design ideal for stacking multiple AV components
- Adjustable width and depth

Part No:	PS200
Colour:	Black
Max weight:	45kg (100lbs)
Width/depth range:	405-468mm / 377-584mm

Cable management channels

- Keeps cables and power cords out of sight for a clean and professional appearance
- Paintable surface to match any environment

Part No:	PCC
Colour:	Black
Length:	300mm (12")
Dimensions:	79 x 27 x 1371mm

Camera mount

- Ball and socket for 360° pan and 90° tilt for positioning direction of camera
- 178mm (7") arm extension

Part No:	CMR410
Colour:	Light grey
Tilt, Swivel:	90°, 360°
Max. weight:	4.5kg (10lbs)

Universal speaker mounts

- Mounts to wall or ceiling with 57mm (2.25") ceiling extension
- Simple tilt, pivot and rotation adjustment
- Available in pairs (PSP2) or pack of 5 (PSP5)

SPK811

PSP

Part No: PSP2, PSP5, SPK811 **Colour:** Black
Tilt, Swivel, Roll: ±90°, 360°, 360° (PSP2, PSP5), ±60°, 360°, ±60° (SPK811)
Max. weight: 3.6kg (PSP2, PSP5), 9kg (SPK811)
Mounting pattern: Universal

Peerless-AV professional ceiling kits

Peerless-AV offers a comprehensive range of ceiling mounts for projectors and flat panel screens in commercial and residential applications. In addition to the UK designed 'Modular Series' (pages 22-23 & 26-27) there is a dedicated range of Peerless-AV Professional solutions to provide added choice and versatility in any installation.

A selection of ceiling plates engineered for specific ceiling types are coupled to extension poles with threaded ends for quick and secure engagement. The system is completed by a range of adaptor & mounting solutions for projectors as well as single or dual flat panel screens, along with accessories to add the finishing touches.

Choosing the perfect combination of projector mount and accessories for your installation is now simpler than ever. Refer to the chart below for a quick reference selection guide.

EXTENSION FROM CEILING

Standard Ceiling Plate

ACC570

Max. weight
68kg (150lbs)

ACC560

Max. weight
23kg (50lbs)

ACC556/912

Heavy duty ACC556 (white)
136kg (300lbs) max.
Standard ACC912 (black)
34kg (75lbs) max.

CMJ470/480/490

CMJ470: 16" joist centres
CMJ480: 20" joist centres
CMJ490: 24" joist centres
All models
136kg (300lbs) max.

Anti Vibration Ceiling Plates

ACC840

For wood joist ceiling
Max. Weight
27kg (60lbs)

ACC845

For Unistrut ceiling
27kg (60lbs) max.
Mounts to 41x41mm Unistrut

I-BEAM/TRUSS AND UNISTRUT APPLICATIONS

I-beam/Truss Adaptors

ACC558/559

ACC558: 102-204mm (4-8") I beams
ACC559: 178-305mm (7-12") I beams
Both models 113kg (250lbs) max.

ACC557

Round, square, rectangular or I-beam truss up to 76x89mm,
544kg (1200lbs) max.

DCT100

Round, square, rectangular or I-beam truss up to 76x89mm,
136kg (300lbs) max.

Unistrut Plates

CMJ300/310



For Unistrut 104mm (CMJ300) or 208mm (CMJ310) spacing between slots,
Max. weight
114kg (250lbs)

ACC550

Mounts to 41x41mm Unistrut,
Max. weight
113kg (250lbs)

NOTE: *Please ensure your selected ceiling plate will accommodate the combined load of all equipment & mount components*

EXTENSION POLE

Fixed Length

	Drop		
EXT002	Flush	**EXT006**	152mm (6")
EXT101	305mm (1')	**EXT103**	914mm (3')
EXT105	1524mm (5')	**EXT110**	3048mm (10")

All models max. weight 544kg (1200lbs)

Adjustable

	Drop
AEC0609	152-229mm (6-9")
AEC12018	305-457mm (12-18")
AEC18024	457-610mm (18-24")
AEC0203	610-914mm (2-3')
AEC0305	914-1524mm (3-5')
AEC0406	1219-1829mm (4-6')
AEC0608	1829-2438mm (6-8')
AEC0810	2438-3048mm (8-10')
AEC1012	3048-3658mm (10-12')

All models max. weight 544kg (1200lbs)

PROJECTOR MOUNT

PRG-UNV

Tilt, Pan, Roll
±20°, 360°, ±10°
Max. weight
22kg (50lbs)
Universal mounting pattern up to 448mm

PRSS-UNV

Tilt, Pan, Roll
+15/-20°, 360°, ±5°
Max. weight
22kg (50lbs)
Universal mounting pattern up to 448mm

PJF2-UNV

Tilt, Pan, Roll
+15/-20°, 360°, ±5°
Max. weight
22kg (50lbs)
Universal mounting pattern up to 448mm

PAG-UNV-HD

Tilt, Pan, Roll
+/-45°, 360°, +/-45°
Max. weight
45kg (100lbs)
Universal mounting pattern up to 448mm

Screen mount and accessories selection grid

Choosing the perfect combination of flat panel screen mount and accessories for your installation is now simpler than ever. Refer to the chart below for a quick reference selection guide for the ideal mount and required accessories.

EXTENSION FROM CEILING

Standard Ceiling Plate

ACC570

Max. weight 68kg (150lbs)

ACC560

Max. weight 23kg (50lbs)

ACC556/912

Heavy duty ACC556 (white) 136kg (300lbs) max.
Standard ACC912 (black) 34kg (75lbs) max.

CMJ470/480/490

CMJ470: 16" joist centres
CMJ480: 20" joist centres
CMJ490: 24" joist centres
All models 136kg (300lbs) max.

Anti Vibration Ceiling Plates

ACC840

For wood joist ceiling
Max. Weight 27kg (60lbs)

ACC845

For Unistrut ceiling 27kg (60lbs) max. Mounts to 41x41mm Unistrut

I-BEAM/TRUSS AND UNISTRUT APPLICATIONS

I-beam/Truss Adaptors

ACC558/559

ACC558: 102-204mm (4-8") I beams
ACC559: 178-305mm (7-12") I beams
Both models 113kg (250lbs) max.

ACC557

Round, square, rectangular or I-beam truss up to 76x89mm, 544kg (1200lbs) max.

DCT100

Round, square, rectangular or I-beam truss up to 76x89mm, 136kg (300lbs) max.

Unistrut Plates

CMJ300/310

For Unistrut 104mm (CMJ300) or 208mm (CMJ310) spacing between slots, Max. weight 114kg (250lbs)

ACC550

Mounts to 41x41mm Unistrut, Max. weight 113kg (250lbs)

NOTE: *Please ensure your selected ceiling plate will accommodate the combined load of all equipment & mount components*

EXTENSION POLE

Fixed Length

	Drop		
EXT002	Flush	**EXT006**	152mm (6")
EXT101	305mm (1')	**EXT103**	914mm (3')
EXT105	1524mm (5')	**EXT110**	3048mm (10")

All models max. weight 544kg (1200lbs)

Adjustable

	Drop
AEC0609	152-229mm (6-9")
AEC12018	305-457mm (12-18")
AEC18024	457-610mm (18-24")
AEC0203	610-914mm (2-3')
AEC0305	914-1524mm (3-5')
AEC0406	1219-1829mm (4-6')
AEC0608	1829-2438mm (6-8')
AEC0810	2438-3048mm (8-10')
AEC1012	3048-3658mm (10-12')

All models max. weight 544kg (1200lbs)

MOUNTING BRACKETS

PLCM-2
Suitable for 1 x LCD or Plasma screen

Screen size	32-60"
Max Weight	102kg (225lbs)
Pan / Tilt	360° / 20°

PLB-1
Suitable for 2 back-to-back LCD or Plasma screens

Screen size	32-50"
Max Weight	136kg (300lbs)
Pan / Tilt	360° / 20°

SCREEN ADAPTOR PLATE

PLP-UNM
Medium universal plate - landscape only

Screen size	22-46"
Max Weight	68kg (150lbs)
Mounting Pattern	Universal up to 438 x 329mm

PLP-UNL
Large universal plate - landscape only

Screen size	32-65"
Max Weight	91kg (200lbs)
Mounting Pattern	Universal up to 729 x 433mm



PLP-UN-1
Large universal plate portrait or landscape mounting

Screen size	32-50"
Max Weight	68kg (150lbs)
Mounting Pattern	Universal up to 701 x 400mm

peerless-AV® Quick reference

VIDEOWALL & DIGITAL SIGNAGE

Model		Screen size	Max. weight	Features	Page
DS-VW765-LQR		40 -65″	57kg (125lbs)	Quick release for recessed applications	19
DS-VW765-PQR		42 -65″	57kg (125lbs)	Quick release for recessed applications	19
DS-VW795-QR		65 - 95″	102kg (225lbs)	Quick release for recessed applications	19
DS-VW765-LAND		40 -65″	57kg (125lbs)	Unlimited video wall display configurations	20
DS-VW765-POR		42 -65″	57kg (125lbs)	Unlimited video wall display configurations	20
DS-VW650		40-50″	34kg (75lbs)	Ultra-slim design modular video wall mount	20
DS-VW665		40-65″	57kg (125lbs)	Flat to wall modular video wall mount	20
DS-VW646-2X2		40-46″	272kg (600lbs)	Single box solution for 2x2 video wall mounting	21
DS-VW660-2X2		47-60″	272kg (600lbs)	Single box solution for 2x2 video wall mounting	21
DS-VWT955		40-55″	182kg (40lbs)	Ceiling mount 2x2 video wall with tilt	21
DST970x2		**40-70″**	**113kg (250lbs)**	**Twin screen digital signage ceiling mount**	**25**
DS-VWC560		40-60″	227kg (500lbs)	Mobile 2x2 video wall trolley	21
DS-VWC555-3x2		46-55″	295kg (650lbs)	Mobile 3x2 video wall trolley	21
DS-VWC655-3X3		46-55″	454kg (1000lbs)	Mobile 3x3 video wall trolley	21
DS508		27-60″	90kg (200lbs)	Tilt wall mount with media device storage	36
DS509		25-60″	90kg (200lbs)	Slim tilt mount with PC holder	36

SPECIALITY WALL/CEILING MOUNTS

Model		Screen size	Max. weight	Features	Page
PLA50-UNL PLA60-UNL		32-65″ 37-65″	68kg (150lbs) 79kg (175lbs)	Dual Twin arm articulating wall mount	17
PLA50-UNL PLA60-UNL		37-65″ 42-71″	79kg (175lbs) 90kg (200lbs)	Dual Twin arm articulating wall mount	17
SF16D		up to 65″ *(with adaptor)*	57kg (125lbs)	Low profile installation	17
ST16D		up to 65″ *(with adaptor)*	57kg (125lbs)	One-touch tilt	17
SP850		26-58″	68kg (150lbs)	Pull-out swivel mount for recessed application	17
SP850-UNL		32-65″	68kg (150lbs)	Pull-out swivel mount for recessed application	17
IM746P		22-46″	32kg (70lbs)	In-wall box with articulating mount	17
IM760PU		32-65″	90kg (200lbs)	In-wall box with articulating mount	17
DMU50SM		37-60″	57kg (125lbs)	Slide-out storage wall mount	36
DS246		29-38″	22kg (50lbs)	Tilt wall mount with storage	36
DS415		32-52″	68kg (150lbs)	Tilt wall mount with storage	36
DST660		40 -60″	57kg (125lbs)	Tilt wall mount with storage	36
DST360		26-60″	68kg (150lbs)	Flat/Tilt wall/ ceiling mount with storage	36
DST995		40-95″	102kg (225lbs)	Flat/Tilt ceiling mount with storage	36
PC930A PC930B PC930C		15-24″	23kg (50lbs)	Adjustable height: 249-353mm 350-556mm 514-864mm	24
PC932A PC932B PC932C		15-40″	36kg (80lbs)	Adjustable height: 249-353mm 350-556mm 514-864mm	24

peerless-AV® Quick reference

PROJECTOR MOUNTS

Model		Colour	Max. weight	Product Feature	Page
PRG-UNV		Black	22kg (50lbs)	Precision gear	28
PRSS-UNV		Black, Silver or White	22kg (50lbs)	Low profile	28
PAG-UNV-HD		Black	45kg (100lbs)	Heavy duty	28
PPF		Black, Silver or White	23kg (50lbs)	Flush to Ceiling	29
PPA		Black, Silver or White	23kg (50lbs)	Ceiling drop 293-397mm Wall Extension 253-357mm	29
PPB		Black, Silver or White	23kg (50lbs)	Ceiling drop 322-525mm Wall Extension 354-557mm	29
PPC		Black, Silver or White	23kg (50lbs)	Ceiling drop 589-908mm (ceiling only)	29
PSTA-600		Black and Silver	11kg (25lbs)	Aluminium alloy telescoping arm 425mm - 600mm	31
PSTA-1200		Black and Silver	11kg (25lbs)	Aluminium alloy telescoping arm 755mm -1200mm	31
PSTA-1600		Black and Silver	11kg (25lbs)	Aluminium alloy telescoping arm 1155mm - 1600mm	31
PSTK-600		Black and Silver	11kg (25lbs)	Aluminium alloy telescoping arm 458mm - 633mm	31
PSTK-1200		Black and Silver	11kg (25lbs)	Aluminium alloy telescoping arm 788mm-1233mm	31
PSTK-1600		Black and Silver	11kg (25lbs)	Aluminium alloy telescoping arm 1188mm-1633mm	31
PSTKE-PRSU/WH		White	11kg (25lbs)	Short throw 160-300mm extension	31
PSTKU-PRSU/WH		White	11kg (25lbs)	Ultra Short throw 320-620mm extension	31
PSTK-PRSU/WH		White	11kg (25lbs)	Extreme short throw 1040-1310mm extension	31

INDOOR INFORMATION, WAYFINDING KIOSKS & OUTDOOR

Model		Screen Size	Max. weight	Product Feature	Page
KIP5XX		40", 42", 46", 47", 55"	34kg (75lb)	Floor standing portrait kiosk	34
KIP5XXB		40", 42", 46", 47", 55"	68kg (150lbs)	Back-2-Back dual screen portrait kiosk	34
KIL5XX		40", 42", 46", 47"	34kg (75lb)	Floor standing landscape kiosk	35
KIP4101		9.79"	2.2kg (5lb)	Counter kiosk designed specifically for iPad	35
KIP6XX		40", 42", 46", 47"	34kg (75lb)	On-wall portrait kiosk	35
KIL6XX		40", 42", 46", 47"	34kg (75lbs)	On-wall landscape kiosk	35
KIP7XX		40", 42", 46", 47"	34kg (75lb)	In-wall portrait kiosk	35
KIL7XX		40", 42", 46", 47"	34kg (75lbs)	In-wall landscape kiosk	35
FPE42F-S FPE47F-S FPE55F-S		40" - 42" 46" - 47" 52" - 55"	113kg (250lbs)	Outdoor enclosure IP56 sealed - with cooling fans	40
FPE42FH-S FPE47FH-S FPE55FH-S		40" - 42" 46" - 47" 52" - 55"	113kg (250lbs)	Outdoor enclosure IP56 sealed with cooling fans & heater	40
EPT650		32-55"	79kg (175lbs)	Outdoor corrosion protection tilt mount	41
ESA746PU		26-46"	36kg (80lbs)	Outdoor corrosion protection articulating mount	41
ESA763PU		37-63"	91kg (200lbs)	Outdoor corrosion protection articulating mount	41
EWMU		32-65"	91kg (200lbs)	Outdoor digital signage tilt mount	41
ECMU-01.. ECMU-02.. ECMU-03.. ECMU-04..		32-65"	91kg (200lbs)	Ceiling drop 457mm 610mm 914mm 1289mm	41
EPMU-05-S EPMU-06-S EPMU-07-S EPMU-08-S		32-65"	91kg (200lbs)	Overall height 1524mm 1800mm 2133mm 2438mm	41

peerless-AV® Quick reference

TROLLEYS AND STANDS

Model		Screen Size	Max. weight	Features	Page
SS550P/-S		Up to 65"	68kg (150lbs)	Stand with adjustable tempered glass shelves	38
SC551GL		Up to 46"	41kg (91lbs)	Trolley - Gas strut height adjustable	38
SS560DPB/ DPS		32-65"	72.5kg (160lbs)	Floor stand can be bolted down	38
SC560DPB/ DPS		Up to 65"	68kg (150lbs)	Twin column trolley for easy manoeuvrability	38
SS560F		Up to 65"	72.5kg (160lbs)	Floor stand can be bolted down	38
SC550		Up to 46"	68kg (150lbs)	Trolley with adjustable glass shelf	38
SS560M		32-65"	32-65"	Stand - Adjustable metal shelf	39
SS560G		32-65"	32-65"	Stand - Adjustable tempered glass shelf	39
SR560M		32-65"	113kg (250lbs)	Trolley - Adjustable metal shelf	39
SR560G		32-65"	113kg (250lbs)	Trolley - Adjustable tempered glass shelf	39
SS560FK		Up to 65"	68kg (150lbs)	Horizontal kiosk stand - Up to 30° tilt	39
SC560FK		Up to 65"	68kg (150lbs)	Horizontal kiosk trolley - Up to 30° tilt	39
FPZ-600		Up to 70"	91kg (200lbs) per display	Fits single, back-to-back or stacked screens	37
FPZ-670		Up to 90"	91kg (200lbs) per display	Enclosure built into base conceals & protects media player	37
SC590		Up to 90"	136kg (300lbs)	Twin column design for added stability	37
COL510P COL610P COL710P COL810P		32-50"	68kg (150lbs)	1524mm height 1829mm height 2134mm height 2438mm height	37

MONITOR & TABLET MOUNTS

Model		Screen Size	Max. weight	Features	Page
PTM200		Universal Tablet	2.27kg (5lbs)	Universal tablet cradle	42
PTM400		Universal Tablet	2.27kg (5lbs)	Universal desktop tablet mount	42
LCT100S		12-30"	7kg (15lbs)	Desktop mount for single screens	42
LCT-101		10-30"	11kg (25lbs)	Articulating desktop mount for LCD screens	43
LCT420A		Up to 30"	7kg (15lbs)	Single arm desktop mount	43
LCW420A		Up to 30"	7kg (15lbs)	Single arm wall mount	43
LCT620A		Up to 30"	7kg (15lbs)	Dual arm desktop mount	43
LCW620A		Up to 30"	7kg (15lbs)	Dual Arm wall mount	43
LCT620AD		Up to 30"	7kg (15lbs) per arm	Dual arm desktop mount for twin monitors	43
LCW620AD		Up to 30"	7kg (15lbs) per arm	Dual arm wall mount for twin monitors	43
LCZ-2F430B		Up to 30"	9kg (20lbs) per screen	Desktop mount for dual monitors	44
LCZ-3F419B		Up to 19"	9kg (20lbs) per screen	Desktop mount for triple monitors	44
LCZ-4F430B		Up to 24"	9kg (20lbs) per screen	Desktop mount for quad monitors	44
LCZ-4F4G30B		Up to 24"	9kg (20lbs) per screen	Desktop mount for quad monitors	44
HP447		32-47"	34kg (75lbs)	Swivel desktop mount for hospitality applications	44
HP455		32-55"	34kg (75lbs)	Swivel desktop mount for hospitality applications	44

Available from:

peerless-AV®

Unit 3, Colonial Way,
Watford, Hertfordshire,
WD24 4WP, United Kingdom
T: 01923 200 100
F: 01923 200 101
E: info.eu@peerless-av.com
W: www.peerless-av.com

© 2013 Peerless Industries, Inc. All rights reserved. E&OE
Selected photography is courtesy of Home Waves Inc.
All brands, product names and taglines are trademarks or registered trademarks of their respective owners.
BBG Distribution Ltd trading as Peerless-AV UK and Peerless-AV Europe

PLS-LIT-PRO-1013